

A1000



240V Class: $\frac{3}{4}$ to 175 HP
480V Class: $\frac{3}{4}$ to 1000 HP
600V Class: 1 to 250 HP



YASKAWA

A Single Drive for all Your Needs, with Outstanding Performance and Flexibility!

The A1000 is a full-featured drive, providing outstanding quality, performance, flexibility, and environmental friendliness through 1000HP. From simple fans and pumps to complex machine control, A1000 can be the single drive platform for an entire facility. Network communications, expandable I/O, and feedback are among the many choices. For new installations or retrofits, the A1000 provides a single robust solution, regardless of your application.

Yaskawa A1000 Family of AC Drives



Configured A1000
Drive Package

Standard A1000 Drives

Contents

Features, Benefits and Specifications	4
Drive and Accessories Selection	16
Mechanical Installation Planning	41
Electrical Installation Planning	46
A1000 Configured Package	50
Yaskawa Industrial Drives Family	52
Global Service Network	54



Features and Benefits

Exceptional Quality

Enjoy peace of mind by knowing that you are considering a product from Yaskawa, the factory automation controls company with the highest reputation for quality and reliability. Historically, Yaskawa drives have demonstrated extremely high reliability with an average MTBF (mean time between failure) of 28 years or more. The new 1000 series products take reliability to the next level with a calculated design life that is twice as long as previous generations.



Highly Integrated Design results in fewer parts and interconnections, reducing the number of failure points.

Component Derating extends the life of any single part by selecting higher specifications (e.g. voltage, current) than what a circuit requires for normal operation.

Latest Generation IGBT Power Modules, capable of four times more thermal cycles than previous designs.


Enhanced Short Circuit Detection and Self Diagnostics provide additional protection against severe catastrophic conditions.

In addition, the A1000 is designed for use around the world, and carries agency certifications for all major geographical regions



Easy to Apply and Maintain

Whether your applications are simple or complex, the A1000 is supported by user-friendly configuration tools. For local field access, the keypad interface features a multi-language LCD display, parameter storage, and application presets to make programming a simple task. It also has built-in memory for backup purposes. In addition, a USB Copy Unit can be loaded with a drive's program for convenient portable transfer of configuration between an office environment and the factory floor.

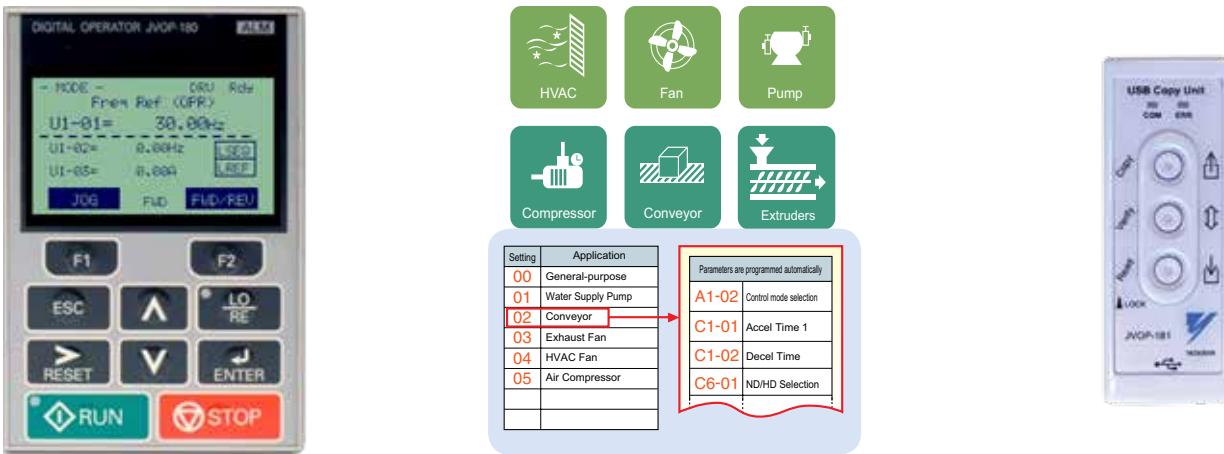

DriveWizard® computer software delivers configuration, monitoring, and trending functions enhanced by direct connectivity through the A1000's standard USB port.

- Online and Offline Editing
- Application Wizard
- Monitoring and Diagnostic Panels
- Trend Recorder and Playback
- Network Configurator
- Multidrive Support
- Drive Flash Support
- Project Converter
- Report and Export Generation
- Search Engine



Features and Benefits

Easy to Apply and Maintain

Preventative Maintenance Monitors

Maximize production and intelligently schedule your maintenance by making use of the A1000's special monitors that provide alarm information when a drive requires attention. Use this information to trigger discrete outputs or send the status across a network for upper level decision making.

- Cooling Fan Remaining Life
- IGBT (Power Module) Remaining Life
- Bus Capacitor Remaining Life
- Precharge Relay
- Drive (Heatsink) Temperature



Highly Reliable and Easily Replaceable Cooling Fans

- Improved location for convenient access
- No tools required
- 24Vdc powered (including large ratings) eliminates need to make proper connection at time of installation



Removeable I/O Terminal Board with Drive Backup Memory

- All parameter changes automatically saved to both main control board and I/O board
- Leave I/O connected when replacing a drive
- Configuration is downloaded to replacement drive
- Reduces MTTR (Mean Time To Repair)



Maximum Flexibility

Have it your way with the A1000's impressive flexibility. Take advantage of a significant quantity of control points as standard. For applications requiring more I/O, feedback, or network choices, the A1000 offers three expansion ports that support a wide variety of interface modules.



Standard I/O and Communications

- Digital Inputs (8)
- Analog Inputs (3)
- Pulse Inputs (1)
- Digital Outputs (4)
- Analog Outputs (2)
- Pulse Outputs (1)
- RS485 Modbus RTU Communication



Expansion Capability

I/O Modules

- Digital Inputs (16)
- Analog Inputs (3)
- Digital Outputs (8)
- Analog Outputs (2)



Feedback Modules

- Incremental Encoder
- Resolver
- Absolute Encoder (Stegmann, Heidenhain)



Communication Modules

- DeviceNet
- EtherNet/IP
- Modbus TCP/IP
- PROFIBUS-DP
- PROFINET
- MECHATROLINK-II
- EtherCAT
- Metasys N2/Apogee FLN (P1)
- BACnet
- LonWorks

Features and Benefits

Maximum Flexibility


Auxiliary Control Power Input

Keep your drives communicating over the network, even while main power is removed. The Auxiliary Control Power Input uses facility supplied 24Vdc to keep the drive's control and communication intact. Service your drive cabinets with the benefit of live control and communications without the need for main power and associated Arc Flash protection.




Embedded Functional Safety

Minimize downtime for applications requiring occasional or frequent mechanical intervention. Safe Torque Off provides safe removal of torque without removal of power to the drive. The A1000 provides this functionality as standard in a safety category 3 architecture, and is certified by TUV to PLd and SIL CL2 according to ISO/EN 13849-1 and IEC/EN 62061 respectively, meeting the requirements of IEC/EN 61508.

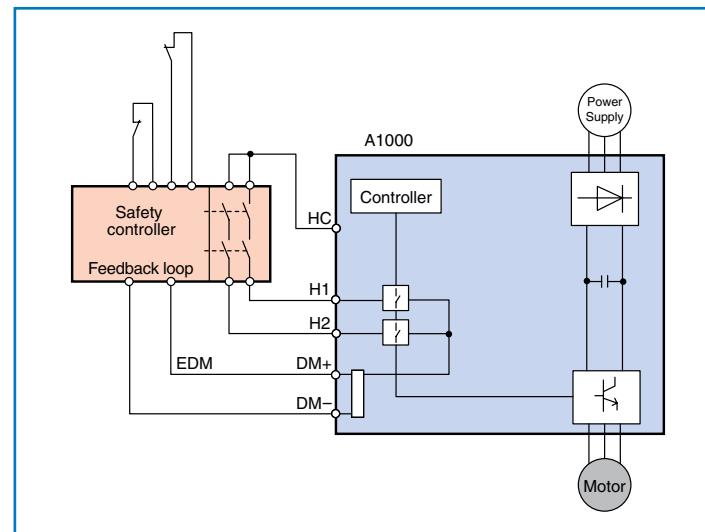


Space Saving Features

The A1000 offers world class power density resulting in an average size reduction of 30% as compared to previous generations (see individual rating dimensions). In addition, even more cabinet space can be saved by taking advantage of External Heatsink Mounting or its Zero Side Clearance capability.

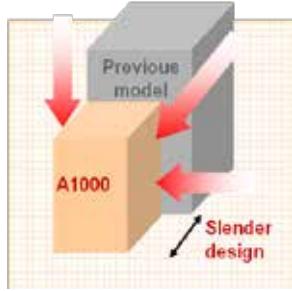

Physical Size Reduction

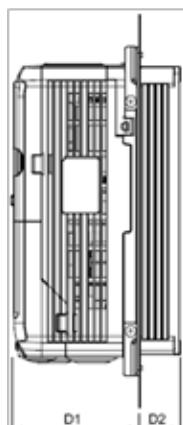

External Heatsink Solution
(Side View)




Zero Side Clearance
(40°C max ambient)

Maximum Flexibility

A variety of braking solutions optimized for your application.


- For high demand braking conditions, the A1000 provides powerful Dynamic Braking with integrated brake transistors through 50HP normal duty (40HP heavy duty). For drives rated through 7.5HP normal duty (5HP heavy duty), drive mounted low duty cycle resistors are available
- For applications that can dissipate losses in the motor, Over-Excitation Braking and High Slip Braking are good performing, money saving alternatives to dynamic braking

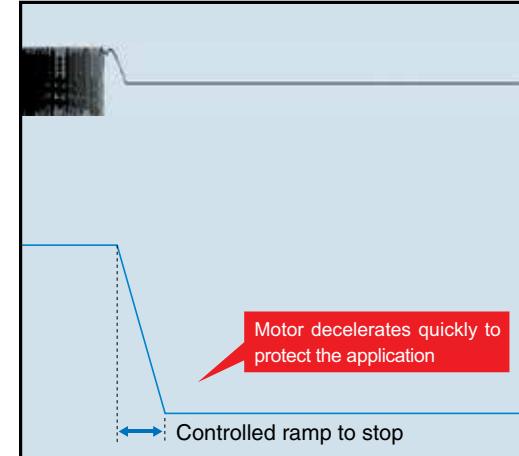

- In the event of a power loss, Kinetic Energy Braking uses energy stored in the rotating load to keep the drive powered and bring the process to a controlled stop

Keep your applications running with features designed to avoid interruptions that are typical with demanding load conditions.

- Optimal Decel automatically extends the programmed deceleration time based on the load condition and drive capability
- Overvoltage Suppression limits the DC bus voltage by modulating output frequency to keep the drive out of the regenerative region
- Overload Fault Prevention responds to heavy load conditions by adjusting output frequency and voltage to keep the drive's current within operating limits
- Momentary Power Loss Ride-Thru puts the drive in standby mode during transient power losses and then automatically restarts, avoiding potentially costly power related shut down conditions

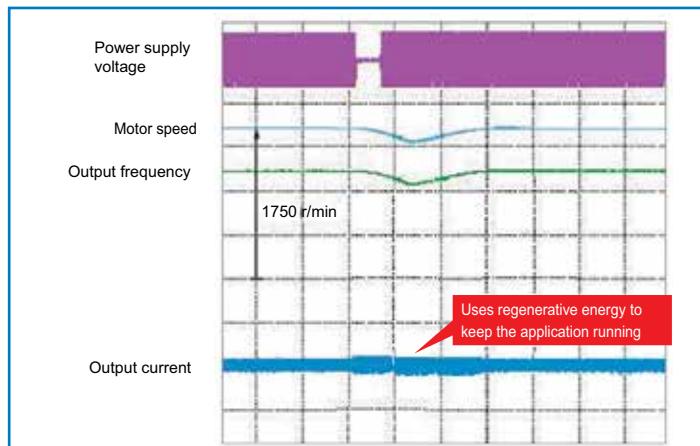


- Speed Search allows the drive to start into a rotating load by quickly matching its speed before delivering full power

Features and Benefits


Maximum Flexibility

- Embedded Application Functions provide system level control without the use of a stand-alone controller.
- PID (Proportional Integral Derivative) Control regulates your process variable (flow, pressure, etc.).
- Droop Control automatically adjusts motor slip to perform load sharing in a multi-drive system.
- Function Block Programming supported by DriveWorksEZ® offers internal logic functions to build the application of your choice.
 - Drag and Drop Graphical Environment
 - Interface with I/O, Drive Data, Network Data
 - Logic Functions
 - Math Functions
 - Timers
 - Counters
 - Subroutine Creation
 - Up to 289 Function Blocks
 - Up to 100 Connections
 - 1 millisecond execution

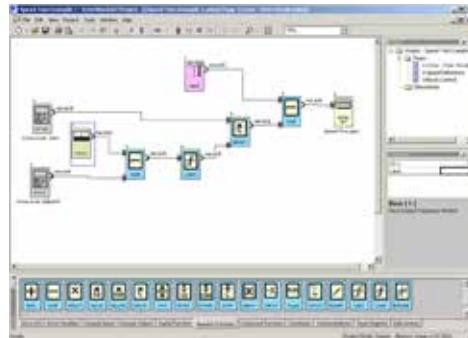

A single drive to control traditional and emerging motor technologies:

- **Induction Motors**
 - Low cost
 - Widely available
 - Efficient
- **Interior Permanent Magnet (IPM) Motors**
 - Very Compact
 - Highly Efficient
 - Sensorless High Precision Control
- **Surface Permanent Magnet (SPM) Motors**
 - Ultra Compact
 - Highly Efficient

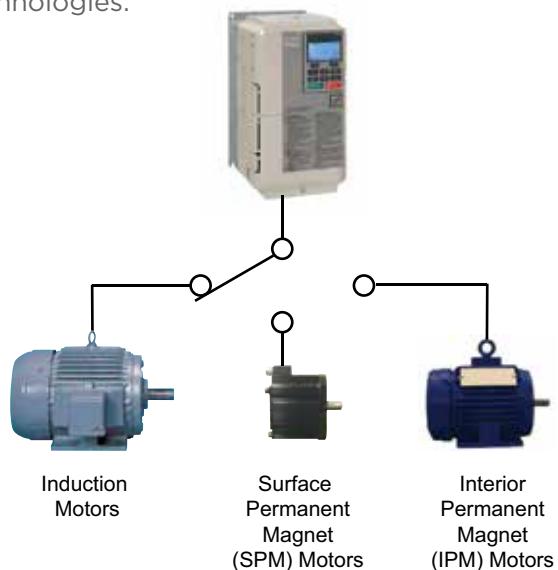

Type 12 Flange Configuration



A1000 is available in all ratings as a Type 12 Flange configuration that allows for mounting the drive with its heatsink out the back of any Type 12 enclosure. This allows for the majority of the drive's heat to dissipate on the external side, while keeping the enclosure small and sealed with Type 12 integrity.



Outstanding Performance

The A1000 delivers incredible performance, producing up to 200% torque with or without feedback.


- Continuous Autotuning automatically compensates for changes in motor temperature
- Inertia Autotuning automatically sets gains for speed and torque loops
- Dead-Time Compensation drastically reduces torque ripple at low speeds
- High Frequency Injection (for IPM motors) enables high precision control without feedback, including positioning to within ± 5 degrees !

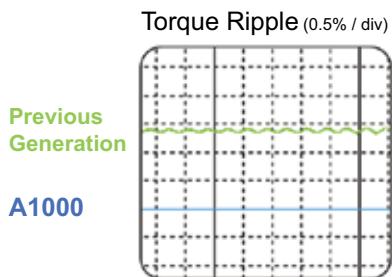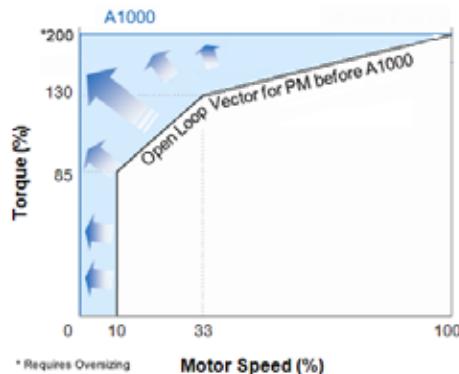

Speed Control Range	1500:1 Closed Loop Vector (Induction and PM Motors) 200:1 Open Loop Vector (Induction Motors) 100:1 Open Loop Vector (IPM Motors)
Speed Accuracy	0.02% - Closed Loop Vector (Induction Motors) 0.2% - Open Loop Vector (Induction Motors) 0.00% - Closed Loop Vector (IPM & SPM Motors) 0.00% - Open Loop Vector (IPM Motors)
Speed Response	60 Hz - Closed Loop Vector 10 Hz - Open Loop Vector
Torque Response	300 Hz - Closed Loop Vector

Environmentally Friendly


Reduce your energy bill and contribute towards a cleaner environment with sustainable features designed into the A1000.

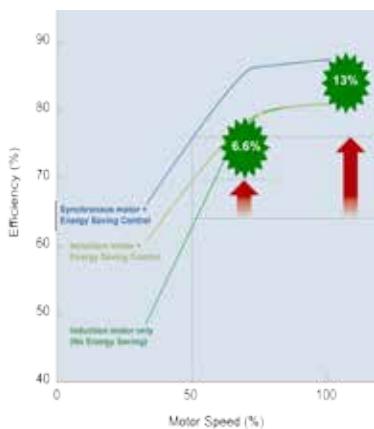

Applying variable speed often results in large energy savings. Combining this with more efficient motors magnifies the result.

Built-in DC Reactors (30 HP and larger) provide input harmonics benefit, and protection from input disturbances.

To further reduce harmonics reflected back to the utility power line, the A1000 is available with an integrated 12-pulse diode bridge from 40 to 1000 HP @ 480 VAC (also requires the use of an external phase shifting transformer)

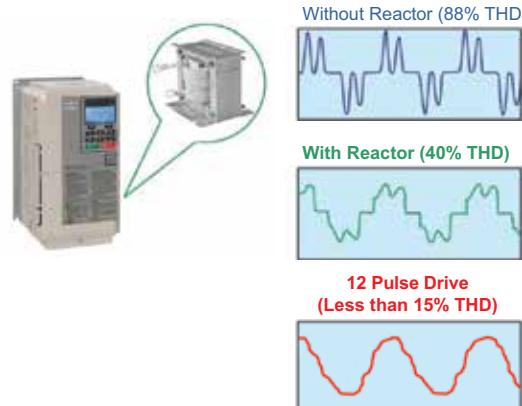

All materials used in the A1000 comply with the directive for Restriction of Hazardous Substances (RoHS)

Specifications

240V Class

Model	CIMR-AU2A		0004	0006	0008	0010	0012	0018	0021	0030	0040	0056	
Max. Applicable Motor Capacity ^{*1}	HP	Normal Duty	0.75	1.5	2	3	3	5	7.5	10	15	20	
		Heavy Duty	0.75	1	2	2	3	3	5	7.5	10	15	
Input	A	Rated Input Current ^{*2}	Normal Duty	3.9	7.3	8.8	10.8	13.9	18.5	24	37	52	
		Heavy Duty	2.9	5.8	7	7.5	11	15.6	18.9	28	37	52	
Output	kVA	Rated Output Capacity ^{*4}	Normal Duty ^{*5}	1.3	2.3	3	3.7	4.6	6.7	8	11.4	15.2	
		Heavy Duty	1.2 ^{*6}	1.9 ^{*6}	2.6 ^{*6}	3 ^{*6}	4.2 ^{*6}	5.3 ^{*6}	6.7 ^{*6}	9.5 ^{*5}	12.6 ^{*5}	17.9 ^{*5}	
Output	A	Rated Output Current	Normal Duty ^{*5}	3.5	6	8	9.6	12	17.5	21	30	40	
		Heavy Duty	3.2 ^{*6}	5 ^{*6}	6.9 ^{*6}	8 ^{*6}	11 ^{*6}	14 ^{*6}	17.5 ^{*6}	25 ^{*5}	33 ^{*5}	47 ^{*5}	
Overload Tolerance			Normal Duty Rating: 120% of rated output current for 60 sec. Heavy Duty Rating: 150% of rated output current for 60 sec. (Derating may be required for applications that start and stop frequently)										
Carrier Frequency (User Adjustable)			2 to 15 kHz										
Max. Output Voltage			Three-phase 200 to 240 V (relative to input voltage)										
Max. Output Frequency			400 Hz										
Power	Rated Voltage/Rated Frequency			Three-phase 200 to 240 Vac 50/60 Hz 270 to 340 Vdc ^{*3}									
	Allowable Voltage Fluctuation			-15% to +10%									
	Allowable Frequency Fluctuation			±5%									
	Braking Transistor			Included									
	Fan			No fan					With fan				
	DC Link Choke			External Option									
	kVA	Normal Duty	2.2	3.1	4.1	5.8	7.8	9.5	14	18	27	36	
		Heavy Duty	1.3	2.2	3.1	4.1	5.8	7.8	9.5	14	18	27	

Model	CIMR-AU2A		0069	0081	0110	0138	0169	0211	0250	0312	0360	0415						
Max. Applicable Motor Capacity ^{*1}	HP	Normal Duty	25	30	40	50	60	75	100	125	150	175						
		Heavy Duty	20	25	30	40	50	60	75	100	125	150						
Input	A	Rated Input Current ^{*2}	Normal Duty	80	96	111	136	164	200	271	324	394						
		Heavy Duty	68	80	82	111	136	164	200	271	324	394						
Output	kVA	Rated Output Capacity ^{*4}	Normal Duty ^{*5}	26	31	42	53	64	80	95	119	137						
		Heavy Duty	23 ^{*6}	29 ^{*6}	32 ^{*6}	44 ^{*6}	55 ^{*6}	69 ^{*7}	82 ^{*7}	108 ^{*7}	132 ^{*7}	158 ^{*5}						
Output	A	Rated Output Current	Normal Duty ^{*5}	69	81	110	138	169	211	250	312	360						
		Heavy Duty	60 ^{*6}	75 ^{*6}	85 ^{*5}	115 ^{*6}	145 ^{*6}	180 ^{*7}	215 ^{*7}	283 ^{*7}	346 ^{*7}	415 ^{*5}						
Overload Tolerance			Normal Duty Rating: 120% of rated output current for 60 sec. Heavy Duty Rating: 150% of rated output current for 60 sec. (Derating may be required for applications that start and stop frequently)															
Carrier Frequency (User Adjustable)			2 to 15 kHz					2 to 10 kHz										
Max. Output Voltage			Three-phase 200 to 240 V (relative to input voltage)															
Max. Output Frequency			400 Hz (user-set)															
Power	Rated Voltage/Rated Frequency			Three-phase 200 to 240 Vac 50/60 Hz 270 to 340 Vdc ^{*3}														
	Allowable Voltage Fluctuation			-15% to +10%														
	Allowable Frequency Fluctuation			±5%														
	Braking Transistor			Included					External Option									
	Fan			With fan														
	DC Link Choke			External Option					Included									
	kVA	Normal Duty	44	52	51	62	75	91	124	148	180	215						
		Heavy Duty	36	44	37	51	62	75	91	124	148	180						

- *1. The motor capacity (HP) refers to a NEC rated 4-pole motor. The rated output current of the drive output amps should be equal to or greater than the motor current. Select the appropriate capacity drive if operating the motor continuously above motor nameplate current.
- *2. Assumes operation at the rated output current. Input current rating varies depending on the power supply transformer, input reactor, wiring connections, and power supply impedance.
- *3. DC is not available for UL/CE standards.
- *4. Rated motor capacity is calculated with a rated output voltage of 230V.
- *5. Carrier frequency is set to 2 kHz. Current derating is required in order to raise the carrier frequency.
- *6. Carrier frequency can be increased to 8 kHz while keeping this current derating. Higher carrier frequency settings require derating.
- *7. Carrier frequency can be increased to 5 kHz while keeping this current derating. Higher carrier frequency settings require derating.

480V Class

Model	CIMR-AU4A	0002	0004	0005	0007	0009	0011	0018	0023	0031	0038	0044	0058	0072	
Max. Applicable Motor Capacity ^{*1}	Normal Duty	1	2	3	3	5	7.5	10	15	20	25	30	40	50	
	Heavy Duty	0.75	2	3	3	5	5	10	10	15	20	30	30	40	
Input Current ^{*2}	Rated Input Current A	Normal Duty	2.1	4.3	5.9	8.1	9.4	14	20	24	38	51	60	58	
		Heavy Duty	1.8	3.2	4.4	6	8.2	10.4	15	20	29	41	51	43	
Output Rated Output Capacity ^{*4}	Rated Output Capacity kVA	Normal Duty ^{*5}	1.6	3.1	4.1	5.3	6.7	8.5	13.3	17.5	24	29	34	44	
		Heavy Duty	1.4 ^{*6}	2.6 ^{*6}	3.7 ^{*6}	4.2 ^{*6}	5.5 ^{*6}	7 ^{*6}	11.3 ^{*6}	13.7 ^{*6}	18.3 ^{*6}	24 ^{*6}	30 ^{*6}	34 ^{*6}	
Output Rated Output Current	Normal Duty ^{*5}	2.1	4.1	5.4	6.9	8.8	11.1	17.5	23	31	38	44	58	72	
	Heavy Duty	1.8 ^{*6}	3.4 ^{*6}	4.8 ^{*6}	5.5 ^{*6}	7.2 ^{*6}	9.2 ^{*6}	14.8 ^{*6}	18 ^{*6}	24 ^{*6}	31 ^{*6}	39 ^{*6}	45 ^{*6}	60 ^{*6}	
Overload Tolerance		Normal Duty Rating: 120% of rated output current for 60 sec. Heavy Duty Rating: 150% of rated output current for 60 sec. (Derating may be required for repetitive loads)													
Carrier Frequency (User Adjustable)		2 to 15 kHz													
Max. Output Voltage		Three-phase 380 to 480 V (relative to input voltage)													
Max. Output Frequency		400 Hz													
Power	Rated Voltage/Rated Frequency		Three-phase 380 to 480 Vac 50/60 Hz 510 to 680 Vdc ^{*3}												
	Allowable Voltage Fluctuation		-15% to +10%												
	Allowable Frequency Fluctuation		±5%												
	Braking Transistor		Included												
	Fan		No fan				With fan								
	DC Link Choke		External Option										Included		
	Power Supply kVA	Normal Duty	2.3	4.3	6.1	8.1	10	14.5	19.4	28.4	37.5	46.6	54.9	53	64.9
		Heavy Duty	1.4	2.3	4.3	6.1	8.1	10	14.6	19.2	28.4	37.5	46.6	39.3	53

Model	CIMR-AU4A	0088	0103	0139	0165	0208	0250	0296	0362	0414	0515	0675	0930	1200									
Max. Applicable Motor Capacity ^{*1}	Normal Duty	60	75	100	125	150	200	250	300	350	450	600	800	1000									
	Heavy Duty	60	60	75	100	150	150	200	250	300	350	500	700	900									
Input Current ^{*2}	Rated Input Current A	Normal Duty	86	105	142	170	207	248	300	346	410	465	657	922	1158								
		Heavy Duty	71	86	105	142	170	207	248	300	346	410	584	830	1031								
Output Rated Output Capacity ^{*4}	Rated Output Capacity kVA	Normal Duty ^{*5}	67	78	106	126	159	191	226	276	316	392	514	709	915								
		Heavy Duty	57 ^{*6}	69 ^{*6}	85 ^{*6}	114 ^{*7}	137 ^{*7}	165 ^{*7}	198 ^{*7}	232 ^{*7}	282 ^{*5}	343 ^{*5}	461 ^{*5}	617 ^{*5}	831 ^{*5}								
Output Rated Output Current	Normal Duty ^{*5}	88	103	139	165	208	250	296	362	414	515	675	930	1200									
	Heavy Duty	75 ^{*6}	91 ^{*6}	112 ^{*6}	150 ^{*7}	180 ^{*7}	216 ^{*7}	260 ^{*7}	304 ^{*7}	370 ^{*5}	450 ^{*5}	605 ^{*5}	810 ^{*5}	1090 ^{*5}									
Overload Tolerance		Normal Duty Rating: 120% of rated output current for 60 sec. Heavy Duty Rating: 150% of rated output current for 60 sec. (Derating may be required for repetitive loads)																					
Carrier Frequency (User Adjustable)		2 to 15 kHz				2 to 10 kHz				2 to 5 kHz													
Max. Output Voltage		Three-phase 380 to 480 V (relative to input voltage)																					
Max. Output Frequency		400 Hz (user-set)																					
Power	Rated Voltage/Rated Frequency		Three-phase 380 to 480 Vac 50/60 Hz 510 to 680 Vdc ^{*3}																				
	Allowable Voltage Fluctuation		-15% to +10%																				
	Allowable Frequency Fluctuation		±5%																				
	Braking Transistor		External Option																				
	Fan		With fan																				
	DC Link Choke		Included																				
	Power Supply kVA	Normal Duty	78.6	96	130	156	189	227	274	316	375	425	601	843	601								
		Heavy Duty	64.9	78.6	96	130	155	189	227	274	316	375	534	759	508								

- *1. The motor capacity (HP) refers to a NEC rated 4-pole motor. The rated output current of the drive output amps should be equal to or greater than the motor current. Select the appropriate capacity drive if operating the motor continuously above motor nameplate current.
- *2. Assumes operation at the rated output current. Input current rating varies depending on the power supply transformer, input reactor, wiring connections, and power supply impedance.
- *3. DC is not available for UL/CE standards.
- *4. Rated motor capacity is calculated with a rated output voltage of 460V.
- *5. Carrier frequency is set to 2 kHz. Current derating is required in order to raise the carrier frequency.
- *6. Carrier frequency can be increased to 8 kHz while keeping this current derating. Higher carrier frequency settings require derating.
- *7. Carrier frequency can be increased to 5 kHz while keeping this current derating. Higher carrier frequency settings require derating.

Specifications

600V Class

Model	CIMR-AU5A		0003	0004	0006	0009	0011	0017	0022	0027	0032	
Max. Applicable Motor Capacity ^{*1}	HP	Normal Duty	2	3	5	7.5	10	15	20	25	30	
		Heavy Duty	1	2	3	5	7.5	10	15	20	25	
Input Rated Input Current ^{*2}	A	Normal Duty	3.6	5.1	8.3	12	16	23	31	38	45	
		Heavy Duty	1.9	3.6	5.1	8.3	12	16	23	31	38	
Output Rated Output Capacity ^{*3}	kVA	Normal Duty ^{*4}	2.7	3.9	6.1	9	11	17	22	27	32	
		Heavy Duty	1.7 ^{*5}	3.5 ^{*5}	4.1 ^{*5}	6.3 ^{*5}	9.8 ^{*5}	12 ^{*5}	17 ^{*5}	22 ^{*5}	27 ^{*5}	
Output Rated Output Current	A	Normal Duty ^{*4}	2.7	3.9	6.1	9	11	17	22	27	32	
		Heavy Duty	1.7 ^{*5}	3.5 ^{*5}	4.1 ^{*5}	6.3 ^{*5}	9.8 ^{*5}	12 ^{*5}	17 ^{*5}	22 ^{*5}	27 ^{*5}	
Overload Tolerance			Normal Duty Rating: 120% of rated output current for 60 sec. Heavy Duty Rating: 150% of rated output current for 60 sec. (Derating may be required for applications that start and stop frequently)									
Carrier Frequency			2 to 15 kHz									
Max. Output Voltage			Three-phase: 500 to 600 V (proportional to input voltage)									
Max. Output Frequency			400 Hz									
Power	Rated Voltage/Rated Frequency			Three-phase 500 to 600 Vac 50/60 Hz								
	Allowable Voltage Fluctuation			-10 (-15) to +10%								
	Allowable Frequency Fluctuation			±5%								
	Braking Transistor			Included								
	Fan			No fan				With fan				
	DC Link Choke			Included								
	Power Supply	kVA	Normal Duty	4.1	5.8	9.5	14	18	26	35	43	51
			Heavy Duty	2.2	4.1	5.8	9.5	14	18	26	35	43

Model	CIMR-AU5A		0041	0052	0062	0077	0099	0125	0145	0192	0242	
Max. Applicable Motor Capacity ^{*1}	HP	Normal Duty	40	50	60	75	100	125	150	200	250	
		Heavy Duty	30	40	50	60	75	100	125	150	200	
Input Rated Input Current ^{*2}	A	Normal Duty	41	52	62	77	99	125	145	192	242	
		Heavy Duty	32	41	52	62	77	100	130	172	200	
Output Rated Output Capacity ^{*3}	kVA	Normal Duty ^{*4}	41	52	62	77	99					
		Heavy Duty	32 ^{*5}	41 ^{*5}	52 ^{*5}	62 ^{*5}	77 ^{*6}					
Output Rated Output Current	A	Normal Duty ^{*4}	41	52	62	77	99					
		Heavy Duty	32 ^{*5}	41 ^{*5}	52 ^{*5}	62 ^{*5}	77 ^{*6}					
Overload Tolerance			Normal Duty Rating: 120% of rated output current for 60 sec. Heavy Duty Rating: 150% of rated output current for 60 sec. (Derating may be required for applications that start and stop frequently)									
Carrier Frequency			2 to 15 kHz									
Max. Output Voltage			Three-phase: 500 to 600 V (proportional to input voltage)									
Max. Output Frequency			400 Hz (user-set)									
Power	Rated Voltage/Rated Frequency			Three-phase 500 to 600 Vac 50/60 Hz								
	Allowable Voltage Fluctuation			-10 (-15) to +10%								
	Allowable Frequency Fluctuation			±5%								
	Braking Transistor			Data not available								
	Fan			Data not available								
	DC Link Choke			Data not available								
	Power Supply	kVA	Normal Duty	50	62	75	91	123				
			Heavy Duty	38	50	62	75	91				

*1. The motor capacity (HP) refers to a NEC rated 4-pole motor. The rated output current of the drive output amps should be equal to or greater than the motor current. Select the appropriate capacity drive if operating the motor continuously above motor nameplate current.

*2. Assumes operation at the rated output current. Input current rating varies depending on the power supply transformer, input reactor, wiring connections, and power supply impedance.

*3. Rated motor capacity is calculated with a rated output voltage of 575V.

*4. Carrier frequency is set to 2 kHz. Current derating is required to raise the carrier frequency.

*5. Carrier frequency can be increased to 8 kHz while keeping this current derating. Higher carrier frequency settings require derating.

*6. Carrier frequency can be increased to 5 kHz while keeping this current derating. Higher carrier frequency settings require derating.

Common Specifications

	Specifications						
Item							
Control Characteristics	Control Methods	•V/f Control (V/f) •V/f Control with PG (V/f w/PG) •Open Loop Vector Control (OLV) •Closed Loop Vector Control (CLV) •Open Loop Vector Control for PM (OLV/PM) •Advanced Open Loop Vector Control for PM (AOLV/PM) •Closed Loop Vector Control for PM (CLV/PM)					
	Frequency Control Range	0.01 to 400 Hz (up to 1000 Hz is available with optional software)					
	Frequency Accuracy (Temperature Fluctuation)	Digital input: within $\pm 0.01\%$ of the max output frequency (-10 to +40 °C) Analog input: within $\pm 0.1\%$ of the max output frequency (25 °C ± 10 °C)					
	Frequency Setting Resolution	Digital inputs: 0.01 Hz Analog inputs: 1/2048 of the maximum output frequency setting (11 bit plus sign)					
	Output Frequency Resolution	0.001 Hz					
	Frequency Setting Methods	-10 to +10 V, 0 to +10 V, 4 to 20 mA, Pulse Train Input					
	Starting Torque ^{<1>}	V/f, V/f w/PG: 150% at 3 Hz CLV, AOLV/PM, CLV/PM: 200% at 0 r/min	OLV: 200% at 0.3 Hz OLV/PM: 100% at 5% speed				
	Speed Control Range ^{<1>}	V/f, V/f w/PG: 1:40 OLV/PM: 1:20	OLV: 1:200 AOLV/PM: 1:100	CLV, CLV/PM: 1:1500			
	Speed Control Accuracy ^{<1>}	OLV: $\pm 0.2\%$ (25 °C ± 10 °C)	CLV: $\pm 0.01\%$ (25 °C ± 10 °C)				
	Speed Response ^{<1>}	OLV, OLV/PM, AOLV/PM: 10 Hz	CLV, CLV/PM: 50 Hz				
	Torque Limit	Separate limits in four quadrants (available in OLV, CLV, AOLV/PM, CLV/PM)					
	Accel/Decel Time	0.0 to 6000.0 s (4 selectable combinations of independent acceleration and deceleration settings)					
	Braking Torque	Approx. 20% (approx. 125% when using braking resistor) ^{<2>} • Short-time decel torque ^{<2>} : over 100% for 0.5/1.0 HP motors, over 50% for 2.0 HP motors, and over 20% for 3.0 HP and above motors ^{<2>} (overexcitation braking/High Slip Braking: approx. 40%). • Continuous regenerative torque: approx. 20% ^{<2>} (approx. 125% with dynamic braking resistor option ^{<2>} : 10% ED, 10s).					
	Braking Transistor	Models 2A0004 to 2A0138, 4A0002 to 4A0072, and 5A0003 to 5A0032 have a built-in braking transistor.					
	V/f Characteristics	User-selected programs and V/f preset patterns possible					
Protection Function	Main Control Functions	Torque Control, Droop Control, Speed/torque Control Switching, Feed Forward Control, Zero Servo Function, Momentary Power Loss Ride-Thru, Speed Search, Overtorque/Undertorque Detection, Torque Limit, 17 Step Speed (max), Accel/decel Switch, S-curve Accel/decel, 3-wire Sequence, Auto-tuning (rotational, stationary tuning), Dwell, Cooling Fan on/off Switch, Slip Compensation, Torque Compensation, Frequency Jump, Upper/lower Limits for Frequency Reference, DC Injection Braking/Start and Stop, Overexcitation Braking, High Slip Braking, PID Control (with sleep function), Energy Saving Control, Modbus Comm, (RS-422/485 max, 115.2 kbps), Fault Restart, Application Presets, DriveWorksEZ (customized function), Removable Terminal Block with Parameter Backup Function, Online Tuning, KEB, Overexcitation Deceleration, Inertia (ASR) Tuning, Overvoltage Suppression, High Frequency Injection.					
	Motor Protection	Electronic thermal overload relay					
	Momentary Overcurrent Protection	Drive stops when output current exceeds 200% of Heavy Duty Rating					
	Overload Protection	Drive stops after 60 s at 150% of rated Heavy Duty output current ^{<3>}					
	Overvoltage Protection	240V class: Faults when DC bus voltage exceeds approx. 410 V; 480V class: Faults when DC bus voltage exceeds approx. 820 V; 600V class: Faults when DC bus voltage exceeds approx. 1040 V.					
	Undervoltage Protection	240V class: Faults when DC bus voltage falls below approx. 190 V; 480V class: Faults when DC bus voltage falls below approx. 380 V; 600V class: Faults when DC bus voltage falls below approx. 475 V.					
	Momentary Power Loss Ride-Thru	Stops modulating after 15 ms or longer power loss ^{<4>} . Resumes operation if power loss is less than 2 s (standard) ^{<7>}					
	Heatsink Overheat Protection	Thermistor					
	Braking Resistance Overheat Protection	Overheat input signal for braking resistor (Optional ERF-type, 3% ED)					
	Stall Prevention	Stall Prevention is available during acceleration, deceleration, and during run.					
Operating Environment	Ground Fault Protection	Electronic circuit protection ^{<5>}					
	Charge LED	Remains lit until DC bus voltage falls below 50 V					
	Area of Use	Indoors					
	Ambient Temperature	-10 to +50°C (Chassis Installation) -10 to +40°C (Chassis with zero side clearance, or Type 1)					
	Humidity	95% RH or less (no condensation)					
	Storage Temperature	-20 to +60°C (short-term temperature during transportation)					
	Altitude	Up to 1000 meters without derating, up to 3000 m with output current and voltage derating					
	Shock	10 to 20 Hz: 9.8 m/s ² 20 to 55 Hz: 5.9 m/s ² (2A0004 to 2A0211, 4A0002 to 4A0165, and 5A0003 to 5A0032) 2.0 m/s ² (2A0250 to 2A0415 and 4A0208 to 4A0675)					
	Standards and Certifications	UL 508C, CSA C22.2, IEC/EN 61508, EN 61800-5-1 ^{<6>}					
	Protection Design	IP00 enclosure, IP20/NEMA Type 1 enclosure ^{<10>}					

- <1> The accuracy of these values depends on motor characteristics, ambient conditions, and drive settings. Specifications may vary with different motors and with changing motor temperature. Contact Yaskawa for consultation.
- <2> Disable Stall Prevention during deceleration ($L3-04 = 0$) when using a regenerative converter, a regenerative unit, a braking resistor or the Braking Resistor Unit. The default setting for the Stall Prevention function will interfere with the braking resistor.
- <3> Instantaneous average deceleration torque refers to the torque required to decelerate the motor (uncoupled from the load) from the rated motor speed down to zero in the shortest time.
- <4> Actual specifications may vary depending on motor characteristics.
- <5> Overload protection may be triggered when operating with 150% of the rated output current if the output frequency is less than 6 Hz.
- <6> May be shorter due to load conditions and motor speed.
- <7> A separate Momentary Power Loss Ride-Thru Unit is required for models 2A0004 to 2A0056, 4A0002 to 4A0031, and 5A0003 to 5A0032 if the application needs to continue running for up to 2 seconds during a momentary power loss.
- <8> Ground protection cannot be provided when the impedance of the ground fault path is too low, or when the drive is powered up while a ground fault is present at the output.
- <9> Terminals H1, H2, DM+, and DM- on 600 V class models are designed to the functionality, but are not certified to Insulation coordination: class 1.
- <10> Removing the top protective cover or bottom conduit bracket from an IP20/NEMA Type 1 enclosure voids NEMA Type 1 protection while maintaining IP20 conformity. This is applicable to models 2A0004 to 2A0211, 4A0002 to 4A0165, and 5A0003 to 5A0032.

Drive Selection

Model Number Key

CIMR-AU 2 A 0004 F A A

AC Drive

A1000 Series

Design Revision

No.	Voltage Class
2A	3-phase, 240V
4A	3-phase, 480V
4T	6-phase, 12-pulse, 480V
5A	3-phase, 600V

No.	Environmental Specification
A	Standard

No.	Enclosure Type
A	IP00
F	NEMA Type1

No.	Output Current Code (A)
See charts on previous pages.	

Note: Current codes are equivalent to the Normal Duty current rating.

The A1000 drive can be sized to maximize its capability based on the application type. For applications with little or no overload requirements, size the drive as “Normal Duty.” For applications requiring more than 120% for 60 seconds, size the drive as “Heavy Duty.” See the chart on the next page to select a specific model.

Duty Rating	Normal Duty	Heavy Duty
Overload capacity	120% for 60 sec.	150% for 60 sec.

Normal Duty Applications




Heavy Duty Applications




Selecting a Drive

For a fan application using a 15 HP motor, select CIMR-AU4A0023 and set it for Normal Duty (C6-01 = 1).

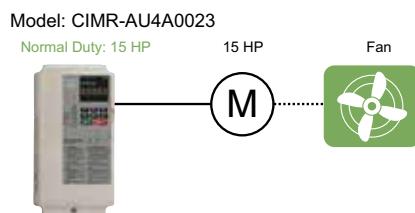

Selecting a Drive

For an extruder application using a 15 HP motor, select CIMR-AU4A0031 and set it for Heavy Duty (default).

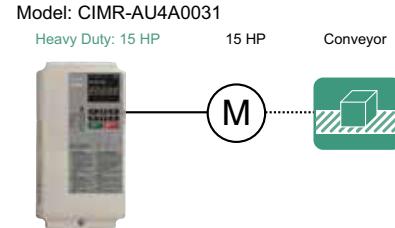

Drive Selection

HP	Three-Phase 240V				Three-Phase 480V				Three-Phase 600V			
	Normal Duty		Heavy Duty		Normal Duty		Heavy Duty		Normal Duty		Heavy Duty	
	Model CIMR-	Rated Output	Model CIMR-	Rated Output	Model CIMR-	Rated Output	Model CIMR-	Rated Output	Model CIMR-	Rated Output	Model CIMR-	Rated Output
0.75	AU2A0004	3.5 A	AU2A0004	3.2 A	AU4A0002	2.1 A	AU4A0002	1.8 A	AU5A0003	2.7 A	AU5A0003	1.7 A
1	AU2A0006	6 A	AU2A0006	5 A	AU4A0004	4.1 A	AU4A0004	3.4 A	AU5A0004	3.5 A	AU5A0004	3.5 A
1.5	AU2A0008	8 A	AU2A0008	6.9 A	AU4A0004	4.1 A	AU4A0004	3.4 A	AU5A0004	3.9 A	AU5A0006	4.1 A
2	AU2A0010	8 A	AU2A0010	9.6 A	AU2A0012	11 A	AU4A0005	5.4 A	AU4A0005	4.8 A	AU5A0004	3.9 A
3	AU2A0012	12 A	AU2A0018	14 A	AU2A0018	17.5 A	AU4A0007	6.9 A	AU4A0007	5.5 A	AU5A0006	6.1 A
5	AU2A0018	17.5 A	AU2A0021	17.5 A	AU4A0009	8.8 A	AU4A0009	7.2 A	AU5A0006	9.2 A	AU5A0009	6.3 A
7.5	AU2A0021	21 A	AU2A0030	25 A	AU2A0030	25 A	AU4A0011	11.1 A	AU4A0018	14.8 A	AU5A0009	9 A
10	AU2A0030	30 A	AU2A0040	33 A	AU2A0040	33 A	AU4A0018	17.5 A	AU4A0023	18 A	AU5A0011	11 A
15	AU2A0040	40 A	AU2A0056	47 A	AU2A0056	47 A	AU4A0023	23 A	AU4A0031	24 A	AU5A0017	17 A
20	AU2A0056	56 A	AU2A0069	60 A	AU2A0069	60 A	AU4A0031	31 A	AU4A0038	31 A	AU5A0022	22 A
25	AU2A0069	69 A	AU2A0081	75 A	AU2A0081	75 A	AU4A0038	38 A	AU4A0044	39 A	AU5A0027	27 A
30	AU2A0081	81 A	AU2A0110	85 A	AU2A0110	85 A	AU4A0044	44 A	AU4A0058	45 A	AU5A0032	32 A
40	AU2A0110	110 A	AU2A0138	115 A	AU2A0138	115 A	AU4A0058	58 A	AU4A0072	60 A	AU5A0041	41 A
50	AU2A0138	138 A	AU2A0169	145 A	AU2A0169	145 A	AU4A0072	72 A	AU4A0088	75 A	AU5A0052	52 A
60	AU2A0169	169 A	AU2A0211	180 A	AU2A0211	180 A	AU4A0088	88 A	AU4A0103	91 A	AU5A0062	62 A
75	AU2A0211	211 A	AU2A0250	215 A	AU2A0250	215 A	AU4A0103	103 A	AU4A0139	112 A	AU5A0077	77 A
100	AU2A0250	250 A	AU2A0312	283 A	AU2A0312	283 A	AU4A0139	139 A	AU4A0165	150 A	AU5A0099	99 A
125	AU2A0312	312 A	AU2A0360	346 A	AU2A0360	346 A	AU4A0165	165 A	AU4A0208	180 A	AU5A0125	125 A
150	AU2A0360	360 A	AU2A0415	415 A	AU2A0415	415 A	AU4A0208	208 A	AU4A0250	216 A	AU5A0145	145 A
175	AU2A0415	415 A					AU4A0250	250 A	AU4A0296	260 A	AU5A0192	192 A
200							AU4A0296	296 A	AU4A0362	304 A	AU5A0242	242 A
250							AU4A0362	362 A	AU4A0414	370 A		
300							AU4A0414	414 A	AU4A0515	450 A		
350							AU4A0515	515 A	AU4A0675	605 A		
400							AU4A0675	675 A	AU4A0930	810 A		
450							AU4A0930	930 A	AU4A1200	1090 A		
500							AU4A1200	1200 A				
550												
600												
700												
750												
800												
900												
1000												

Control Accessories Selection

Control Accessories

I/O and Communication Modules

Type	Name	Model	Function
I/O Expansion Cards	Analog input	AI-A3	<ul style="list-style-type: none"> Allows high precision, high resolution analog reference input Input channels: 3 Voltage input: -10 to 10 Vdc (20 kΩ), 13-bit signed Current input: 4 to 20 mA or 0 to 20 mA (250 Ω), 12 bit
	Analog monitor	AO-A3	<ul style="list-style-type: none"> Provides extra multi-function analog output terminals Output channels: 2 Output voltage: -10 to 10 V, 11 bit (signed)
	Digital Input	DI-A3	<ul style="list-style-type: none"> Sets the frequency reference by digital inputs Input channels: 16 (including SET signal and SIGN signal) Input signal type: BCD 16-bit (4-digit), 12-bit (3-digit), 8 bit (2-digit) Input signal: 24 Vdc, 8 mA
	Digital output	DO-A3	<ul style="list-style-type: none"> Provides extra insulated multi-function digital outputs Photocoupler relays: 6 (48 V, up to 50 mA) Contact relays: 2 (250 Vac/up to 1 A, 30 Vdc/up to 1 A)
Drive Mounted Option Cards	Line Driver Encoder interface	PG-X3	<ul style="list-style-type: none"> For speed feedback input by connecting a motor encoder A QUAD B, and Z output matches RS-422 level, line driver, 300 kHz max Encoder power supply: 5 V or 12 V, max current 200 mA
	Complimentary Encoder interface	PG-B3	<ul style="list-style-type: none"> For speed feedback input by connecting a motor encoder A QUAD B, and Z output, HTL encoder connection, 50 kHz max Output: open collector 24 V max, 30 mA Encoder power supply: 12 V, max current 200 mA
	Resolver Interface	PG-RT3	For speed feedback
Communication Cards	EtherNet/IP	SI-EN3	Connects to an EtherNet/IP network
	Modbus TCP/IP	SI-EM3	Connects to a Modbus TCP/IP network
	DeviceNet	SI-N3	Connects to a DeviceNet network
	PROFIBUS-DP	SI-P3	Connects to a PROFIBUS-DP network
	MECHATROLINK-II	SI-T3	Connects to a MECHATROLINK-II network.
	PROFINET	SI-EP3	Connects to a PROFINET network
	EtherCAT	SI-ES3	Connects to a EtherCAT network
	Metasys N2 / Apogee FLN (P1)	SI-J3	Connects to a Metasys N2 / Apogee FLN (P1) network
	BACnet	SI-B3	Connects to a BACnet network
	LonWorks	SI-W3	Connects to a LonWorks network

Note: When using configuration software installed in a drive on various field networks, a file is required to connect the software to the drive.

* Consult factory for availability

24VDC Auxiliary Control Power Input

The 24VDC auxiliary control power input maintains drive control circuit power in the event of a main power outage. The control circuit keeps the network communications and I/O data operational in the event of a power outage. It supplies external power to the control circuit only.

Drive Model	Part No.
240V Class	PS-A10L
480V and 600V Class	PS-A10H




The installed option adds 50 mm to the total width of the drive.





Control Accessories Selection

Operator Interfaces

The A1000 includes a multi-language LCD interface as standard. A separately sold LED version is also available.

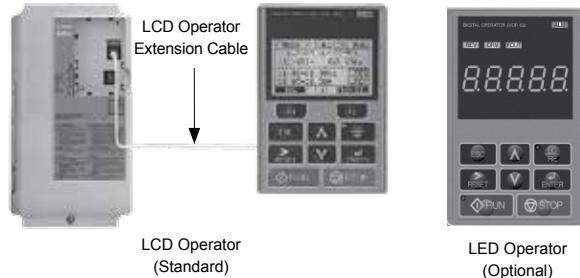

Dimensions (inches)

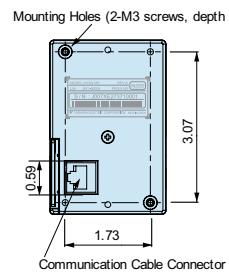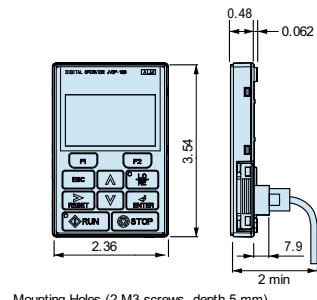

Operator

Type	Part Number
LCD	JVOP-180 (Standard)
LED	JVOP-182 (Optional)

Operator Extension Cables

Part Number	Description
UWR0051	3 ft Extension Cable
UWR0052	10 ft Extension Cable

For remote installation (e.g. cabinet door), use one of the following membrane kits.

Part Number	Item	Installation
UUX000526 (Blank Membrane)		<p>Side view of assembled kit</p>
UUX000527 (Yaskawa Logo Membrane)		<p>Digital operator cable with minimum bend radius 3.0° minimum</p>

USB Interface Cable


(for direct connection between the A1000 and a computer)

Requires A1000 USB device driver file, installed as part of DriveWizard® Industrial (SW.DW.30), available at Yaskawa.com

Part Number	Description
UWR-0638	USB Cable, 10 ft, male A-type to male B-type

USB Copy Unit

(for downloading the same configuration to multiple drives)*

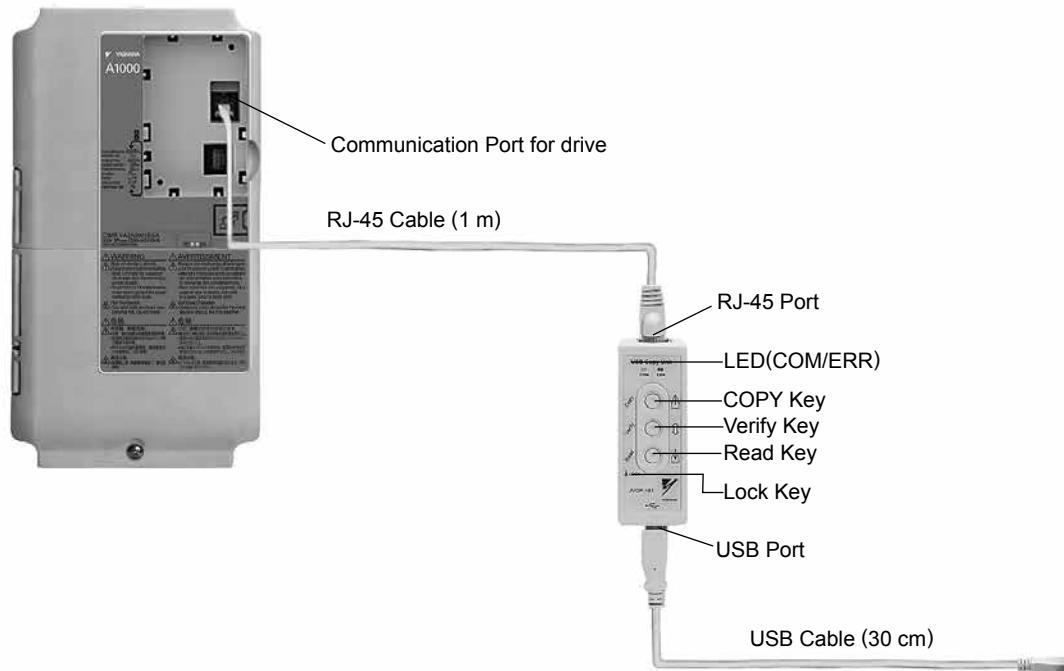

Part Number	Description
JVOP-181	USB Copy Unit with RJ-45 Cable and USB Cable

* Parameters can only be downloaded to a drive when the voltage class, capacity, control mode, and software version match

Mechanical Accessories Selection

Adapter Plates

Adapter Plates are used when replacing an F7 drive with an A1000, or when using an F7 pancake-mounted C1 filter. They consist of a simple plate the height and width (and with holes drilled for the mounting of) an F7 drive, with additional holes to match the mounting dimensions of the smaller A1000. This provides for a means to mount the A1000 drive to the plate; the drive/plate assembly may then be mounted using the old F7 mounting holes.

240V Class	
Model CIMR-AU2A	Part Number EZ2020801□
0004	
0006	
0008	
0010	
0012	
0018	
0021	
0030	
0040	B
0056	C
0069	E
0081	
0110	Not Required
0138	
0169	F
0211	
0250	L
0312	
0360	M
0415	N

480V Class	
Model CIMR-AU4A	Part Number EZ2020801□
0002	
0004	
0005	
0007	A
0009	
0011	
0018	
0023	B
0031	C
0038	D
0044	E
0058	G
0072	Not Required
0088	H
0103	J
0139	Not Required
0165	K
0208	L
0250	M
0296	
0362	
0414	UUX000662
0515	UUX000663
0675	
0930 ⁽²⁾	UUX000664
1200 ⁽²⁾	UUX000664S
0930 ⁽²⁾	
1200 ⁽²⁾	

NEMA 1 Endcap Kits

This option consists of a top and bottom cover to convert a protected chassis drive to a NEMA 1 enclosed unit. This option DOES NOT provide additional space for mounting auxiliary components (i.e., circuit breaker, input fuses, reactor, etc.)

240V Class	
Model CIMR-AU2A	Part Number
0110 ⁽¹⁾	EZZ021136A
0138 ⁽¹⁾	EZZ021136B
0169 ⁽¹⁾	EZZ021136C
0211 ⁽¹⁾	
0250	EZZ021136D
0312	
0360	EZZ021136E

480V Class	
Model CIMR-AU2A	Part Number
0058 ⁽¹⁾	EZZ021136F
0072 ⁽¹⁾	EZZ021136G
0088 ⁽¹⁾	EZZ021136H
0103 ⁽¹⁾	
0139 ⁽¹⁾	EZZ021136C
0165 ⁽¹⁾	
0208	EZZ021136D
0250	
0296	EZZ021136E
0362	
0414	UUX000662
0515	UUX000663
0675	
0930 ⁽²⁾	UUX000664
1200 ⁽²⁾	UUX000664S
0930 ⁽²⁾	
1200 ⁽²⁾	

600V Class	
Model CIMR-AU5A	Part Number
0041 ⁽¹⁾	EZZ021136G
0052 ⁽¹⁾	
0062 ⁽¹⁾	
0077 ⁽¹⁾	EZZ021136C
0099 ⁽¹⁾	
0125	EZZ021136D
0145	
0192	EZZ021136E
0242	

Notes:

(1) These ratings are already available as NEMA 1 (FAA) drives; the End Cap Kits for these ratings are shown here only for replacement purposes.

(2) UUX000664 is a floor mount base that mounts underneath models 0930 and 1200. UUX000664S is an optional standoff kit which provides 5 in. of clearance between floor and bottom of mounting base.

External Heatsink Kits

When mounting standard drives with heatsink external (NEMA 1 backside), the following models require a separately sold bracket kit. Larger standard drives include brackets that must be detached from the back and reattached at the midpoint.

When mounting flange drives (models ending in Uxx), a "flange" feature is integral to the design, and therefore these kits are not used.

240V Class	
Model CIMR-AU2A	Part Number EZ020800□
0004	
0006	
0008	
0010	
0012	
0018	
0021	
0030	
0040	
0056	C
0069	
0081	D

480V Class	
Model CIMR-AU4A	Part Number EZ020800□
0002	
0004	A
0005	
0007	
0009	
0011	B
0018	
0023	
0031	C
0038	
0044	D

Capacitor Guards

Capacitor Guards are only required for A1000 IP00 models (those ending in AAA) to prevent exposure of internal components. NEMA 1 models (those ending in FAA) already include these guards as standard. Flange drives (those ending in UAA) do not require cap guards because the backside is protected by other means.

240V Class

Model CIMR-AU2A	Part Number
0004-0211	Not Required
0250	EZZ021352E
0312	
0360	EZZ021352F
0415	

480V Class

Model CIMR-AU2A	Part Number
0002-0165	Not Required
0208	EZZ021352E
0250	
0296	EZZ021352F
0362	
0414	EZZ021352G
0515	EZZ021352H
0675	
0930	EZZ021352J
1200	

600V Class

Model CIMR-AU5A	Part Number
0003-0099	Not Required
0125	EZZ021352E
0145	
0192	EZZ021352F
0242	


240V Class	
Model CIMR-AU5A	Part Number EZ020800□
0003	
0004	A
0006	
0009	B
0011	
0017	C
0022	
0027	D
0032	

Power Accessories Selection

Reactors

Reactors are used either within the DC link circuit of a drive or at the drive's AC input terminals (line reactor). In both cases, the reactor adds impedance which can extend the life of a drive (when used on large power sources with low impedance), and reduce drive induced harmonic currents. In addition, AC reactors can be used at the drive's output terminals (load reactor) to help address a variety of installation challenges such as peak motor voltages that can occur with long motor cables.

For A1000 drives rated up through 30HP (normal duty), either a DC link reactor or AC reactor (or both) may be added. Larger A1000 drives have a DC link reactor as standard.

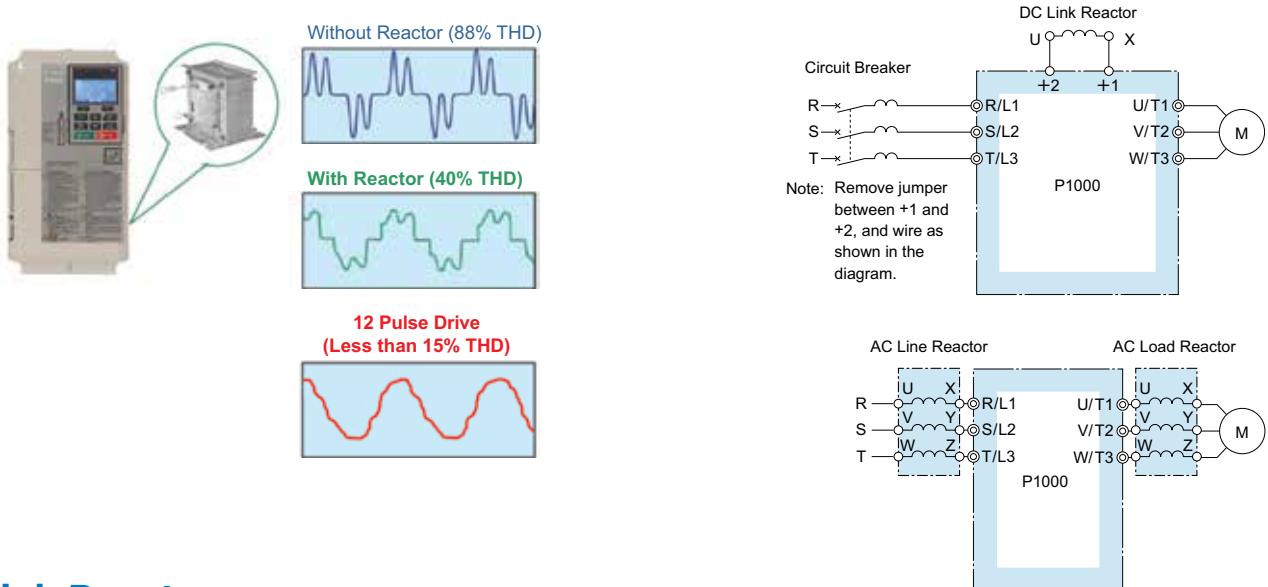

DC Link Reactors

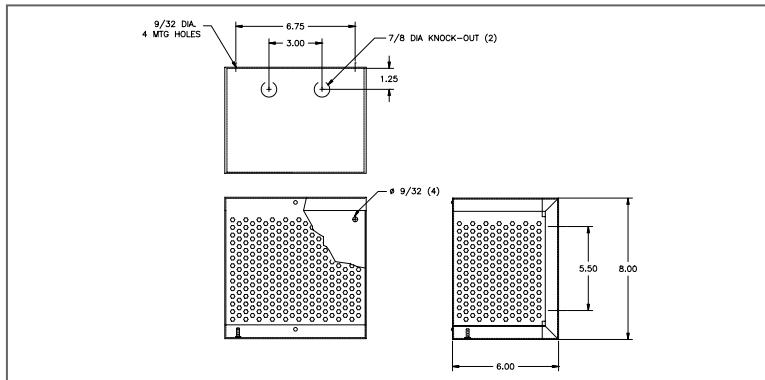


Fig. 1

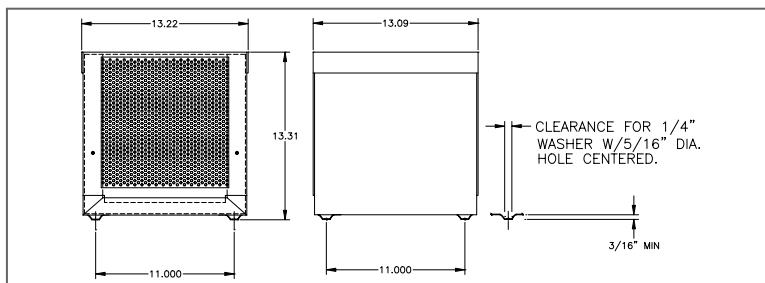


Fig. 2

DC Link Reactors (continued)

240V Class

HP	Drive Model Number: CIMR-AU2A				3% Enclosed Reactor								
					Rated DC Current (A)	Inductance (μ H)	Yaskawa Part Number	Dimensions (in.)				Weight (lb)	Watt Loss (W)
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W	H		
0.5	0004	No	0004	No	2	10000	URX000036**	1	2.81	1.73	2.50	1	3
0.75	0004	No	0004	No	4	5000	05P00608-3007**	1	2.81	1.50	2.50	1	4
1	0006	No	0006	No	4	5000	05P00608-3007**	1	2.81	1.50	2.50	1	4
1.5	0006	No	0008	No	9	3220	URX000257	1	8.00	6.00	8.00	9	7
2	0008	No	0008	No	9	3220	URX000257	1	8.00	6.00	8.00	9	7
3	0010	No	0012	No	12	2100	URX000258	1	8.00	6.00	8.00	11	7
5	0018	No	0021	No	18	1375	URX000259	1	8.00	6.00	8.00	11	9
7.5	0021	No	0030	No	25	1000	URX000051**	2	3.81	2.82	4.50	4	12
10	0030	No	0040	No	32	850	URX000261	1	8.00	6.00	8.00	12	11
15	0040	No	0056	No	50	625	URX000262	1	8.00	6.00	8.00	15	18
20	0056	No	0069	No	62	320	URX000264	2	13.22	13.09	13.00	26	17
25	0069	No	0081	No	80	310	0500620-0129**	2	4.63	6.00	4.00	9	20
30	0081	No	0110	Yes*	92	200	URX000266	2	13.22	13.09	13.00	28	19
40 to 175	Built-In												

HP	Drive Model Number: CIMR-AU2A				5% Enclosed Reactor								
					Rated DC Current (A)	Inductance (μ H)	Yaskawa Part Number	Dimensions (in.)				Weight (lb)	Watt Loss (W)
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W	H		
0.5	0004	No	0004	No	2	20000	0500652-0228**	1	3.00	1.50	2.50	1	4
0.75	0004	No	0004	No	4	12000	URX000207	1	8.00	6.00	8.00	9	5
1	0006	No	0006	No	4	12000	URX000207	1	8.00	6.00	8.00	9	5
1.5	0006	No	0008	No	9	7500	URX000208	1	8.00	6.00	8.00	11	11
2	0008	No	0008	No	9	7500	URX000208	1	8.00	6.00	8.00	11	11
3	0010	No	0012	No	12	4000	URX000209	1	8.00	6.00	8.00	11	11
5	0018	No	0021	No	18	2750	URX000210	1	8.00	6.00	8.00	14	16
7.5	0021	No	0030	No	25	1750	URX000211	1	8.00	6.00	8.00	14	13
10	0030	No	0040	No	32	1620	URX000223	2	13.22	13.09	13.00	28	14
15	0040	No	0056	No	50	970	URX000060**	2	4.63	5.25	5.25	14	19
20	0056	No	0069	No	62	610	URX000213	2	13.22	13.09	13.00	32	20
25	0069	No	0081	No	80	500	URX000069**	2	4.63	7.00	4.00	14	22
30	0081	No	0110*	Yes*	92	600	URX000265	2	13.22	13.09	13.00	41	34
40 to 175	Built-In												

* 'Large' A1000 models include a built-in 3% DC link reactor. If more than 3% equivalent total reactance is needed, use a 3% AC line reactor on these units.

** Does not include NEMA 1 enclosure.

Power Accessories Selection

DC Link Reactors (continued)

480V Class

HP	Drive Model Number: CIMR-AU4A				3% Enclosed Reactor								
					Rated DC Current (A)	Inductance (μ H)	Yaskawa Part Number	Dimensions (in.)				Weight (lb)	Watt Loss (W)
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W	H		
0.5	0002	No	0002	No	2	50000	URX000215	1	8.00	6.00	8.00	9	5
0.75	0002	No	0002	No	2	20000	05P00652-0228**	1	3.00	1.50	2.50	1	4
1	0002	No	0004	No	2	20000	05P00652-0228**	1	3.00	1.50	2.50	1	4
1.5	0004	No	0004	No	4	15000	URX000217	1	8.00	6.00	8.00	9	6
2	0004	No	0004	No	4	15000	URX000217	1	8.00	6.00	8.00	9	6
3	0005	No	0005	No	9	7500	URX000208	1	8.00	6.00	8.00	11	11
5	0009	No	0011	No	9	7500	URX000208	1	8.00	6.00	8.00	11	11
7.5	0011	No	0018	No	12	4000	URX000209	1	8.00	6.00	8.00	11	11
10	0018	No	0018	No	18	2750	URX000210	1	8.00	6.00	8.00	14	16
15	0023	No	0031	No	25	1750	URX000211	1	8.00	6.00	8.00	14	13
20	0031	No	0038	No	32	1620	URX000223	2	13.22	13.09	13.00	28	14
25	0038	No	0044	No	40	1000	URX000184	1	8.00	6.00	8.00	15	17
30	0044	No	0058	Yes*	50	970	URX000060**	2	4.63	5.25	5.25	14	19
40 to 1000	Built-In												

HP	Drive Model Number: CIMR-AU4A				5% Enclosed Reactor								
					Rated DC Current (A)	Inductance (μ H)	Yaskawa Part Number	Dimensions (in.)				Weight (lb)	Watt Loss (W)
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W	H		
0.5	0002	No	0002	No	2	50000	URX000215	1	8.00	6.00	8.00	9	5
0.75	0002	No	0002	No	2	50000	URX000215	1	8.00	6.00	8.00	9	5
1	0002	No	0004	No	2	50000	URX000215	1	8.00	6.00	8.00	9	5
1.5	0004	No	0004	No	4	25000	URX000216	1	8.00	6.00	8.00	11	9
2	0004	No	0004	No	4	25000	URX000216	1	8.00	6.00	8.00	11	9
3	0005	No	0005	No	9	11500	URX000218	1	8.00	6.00	8.00	14	16
5	0009	No	0011	No	9	11500	URX000218	1	8.00	6.00	8.00	14	16
7.5	0011	No	0018	No	12	6000	URX000219	1	8.00	6.00	8.00	11	14
10	0018	No	0018	No	18	6000	URX000260	2	13.22	13.09	13.00	31	20
15	0023	No	0031	No	25	4000	URX000224	2	13.22	13.09	13.00	31	16
20	0031	No	0038	No	32	2680	URX000221	2	13.22	13.09	13.00	32	21
25	0038	No	0044	No	40	2500	URX000225	2	13.22	13.09	13.00	39	29
30	0044	No	0058	Yes*	50	2000	URX000263	2	13.22	13.09	13.00	43	30
40 to 1000	Built-In												

* 'Large' A1000 models include a built-in 3% DC link reactor. If more than 3% equivalent total reactance is needed, use a 3% AC line reactor on these units.

** Does not include NEMA 1 enclosure.

DC Link Reactors (continued)

600V Class

HP	Drive Model Number: CIMR-AU5A				3% Enclosed Reactor								
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor	Rated DC Current (A)	Inductance (μ H)	Yaskawa Part Number	Dimensions (in.)				Weight (lb)	Watt Loss (W)
							Figure	L	W	H			
0.5	0003	No	0003	No	1	60000	URX000039*	1	3.75	2.00	3.25	2	5
0.75	0003	No	0003	No	2	50000	URX000215	1	8.00	6.00	8.00	9	5
1	0003	No	0003	No	2	20000	05P00652-0028**	1	3.00	1.50	2.50	1	4
1.5	0003	No	0004	No	4	15000	URX000217	1	8.00	6.00	8.00	9	6
2	0003	No	0004	No	4	15000	URX000217	1	8.00	6.00	8.00	9	6
3	0004	No	0006	No	4	12000	URX000207	1	8.00	6.00	8.00	9	5
5	0006	No	0009	No	9	7500	URX000208	1	8.00	6.00	8.00	11	11
7.5	0009	No	0011	No	12	4000	URX000209	1	8.00	6.00	8.00	11	11
10	0011	No	0017	No	12	4000	URX000209	1	8.00	6.00	8.00	11	11
15	0017	No	0022	No	18	2750	URX000210	1	8.00	6.00	8.00	14	16
20	0022	No	0027	No	25	1750	URX000211	1	8.00	6.00	8.00	14	13
25	0027	No	0032	No	32	1620	URX000223	2	13.22	13.09	13.00	28	14
30	0032	No	0041	Yes*	40	1000	URX000184	1	8.00	6.00	8.00	15	17
40 to 250	Built-In												






HP	Drive Model Number: CIMR-AU5A				5% Enclosed Reactor								
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor	Rated DC Current (A)	Inductance (μ H)	Yaskawa Part Number	Dimensions (in.)				Weight (lb)	Watt Loss (W)
							Figure	L	W	H			
0.5	0003	No	0003	No	1	80000	URX000035**	1	3.75	1.75	3.25	1	4
0.75	0003	No	0003	No	2	50000	URX000215	1	8.00	6.00	8.00	9	5
1	0003	No	0003	No	2	50000	URX000215	1	8.00	6.00	8.00	9	5
1.5	0003	No	0004	No	4	25000	URX000216	1	8.00	6.00	8.00	11	9
2	0003	No	0004	No	4	25000	URX000216	1	8.00	6.00	8.00	11	9
3	0004	No	0006	No	4	25000	URX000216	1	8.00	6.00	8.00	11	9
5	0006	No	0009	No	9	11500	URX000218	1	8.00	6.00	8.00	14	16
7.5	0009	No	0011	No	12	6000	URX000219	1	8.00	6.00	8.00	11	14
10	0011	No	0017	No	18	3750	URX000220	1	8.00	6.00	8.00	15	17
15	0017	No	0022	No	25	4000	URX000224	2	13.22	13.09	13.00	31	16
20	0022	No	0027	No	25	4000	URX000224	2	13.22	13.09	13.00	31	16
25	0027	No	0032	No	32	2680	URX000221	2	13.22	13.09	13.00	32	21
30	0032	No	0041	Yes*	50	2000	URX000263	2	13.22	13.09	13.00	43	30
40 to 250	Built-In												

*Large A1000 models include a built-in 3% DC link reactor. If more than 3% equivalent total reactance is needed, use a 3% AC line reactor on these units.

** Does not include NEMA 1 enclosure.

Power Accessories Selection

AC Line / Load Reactors

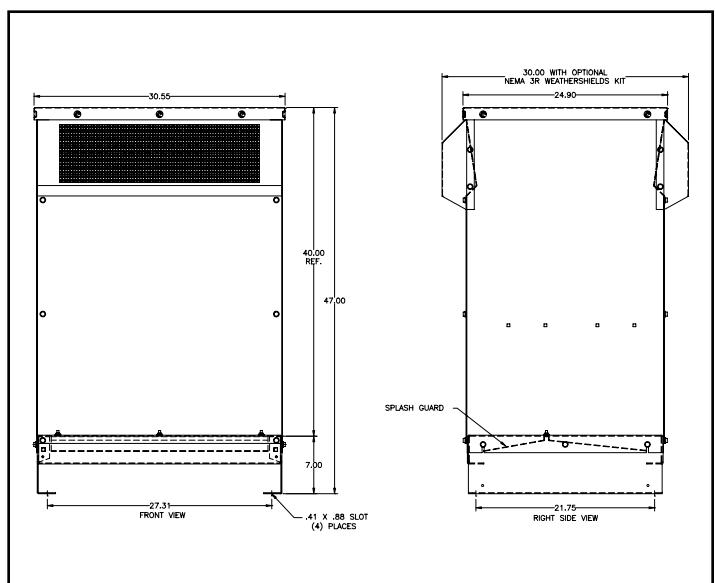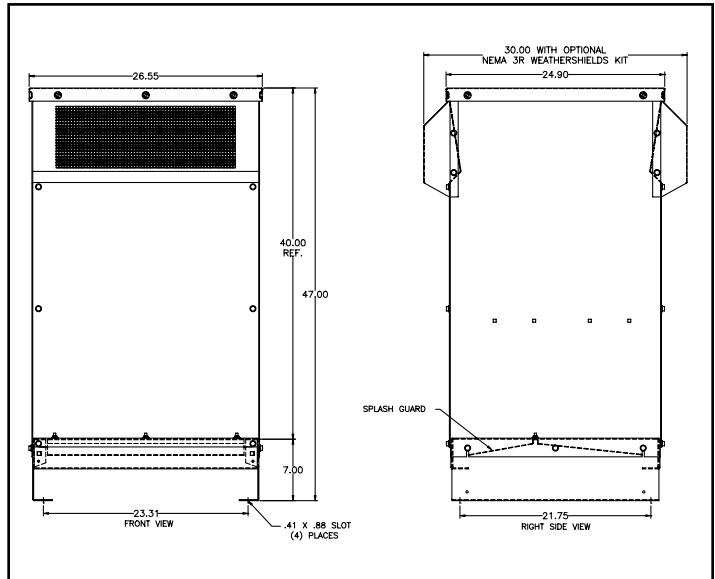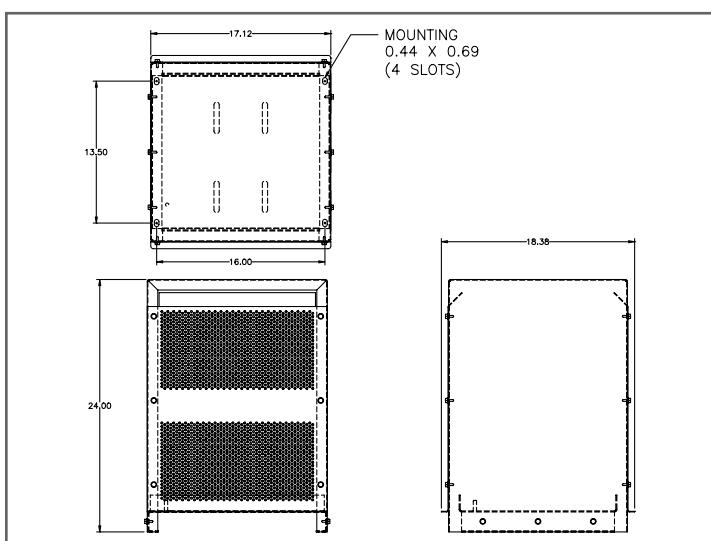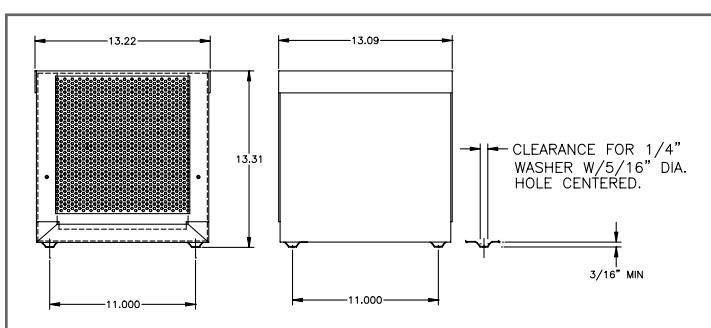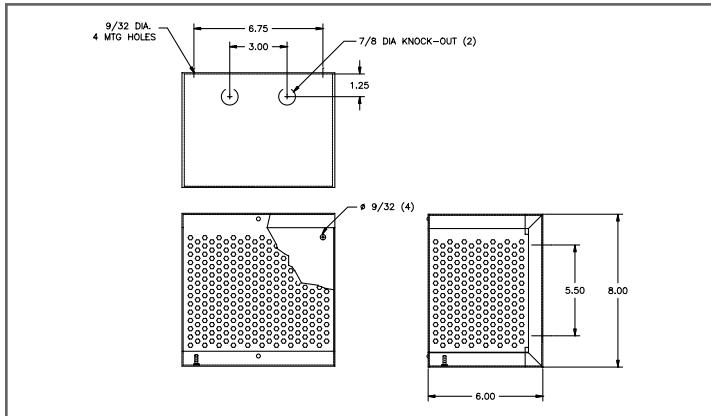

AC Line / Load Reactors (continued)

240V Class

HP	Drive Model Number: CIMR-AU2A				Nominal 3% Impedance*								
					Reactor Rated Current (A)	Inductance (μH)	Enclosed Yaskawa Part Number	Dimensions (in.)			Weight (lb)	Watt Loss (W)	
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W			
0.5	0004	No	0004	No	2	6000	URX000243	1	8.00	6.00	8.00	10	10.7
0.75	0004	No	0004	No	4	3000	05P00620-0020		8.00	6.00	8.00	11	14.5
1	0006	No	0006	No	4	3000	05P00620-0020		8.00	6.00	8.00	11	14.5
1.5	0006	No	0008	No	8	1500	05P00620-0027		8.00	6.00	8.00	14	19.5
2	0008	No	0008	No	8	1500	05P00620-0027		8.00	6.00	8.00	14	19.5
3	0010	No	0012	No	12	1250	05P00620-0032		8.00	6.00	8.00	16	26
5	0018	No	0021	No	18	800	05P00620-0036		8.00	6.00	8.00	16	36
7.5	0021	No	0030	No	25	500	05P00620-0041		13.22	13.09	13.00	29	48
10	0030	No	0040	No	35	400	05P00620-0046	2	13.22	13.09	13.00	32	49
15	0040	No	0056	No	45	300	05P00620-0050		13.22	13.09	13.00	41	54
20	0056	No	0069	No	55	250	05P00620-0054		13.22	13.09	13.00	42	64
25	0069	No	0081	No	80	200	05P00620-0058		13.22	13.09	13.00	43	82
30	0081	No	--	--	80	200	05P00620-0058		13.22	13.09	13.00	43	82
30	--	--	0110	Yes	80	200	05P00620-0058		13.22	13.09	13.00	43	82
40	0110	Yes	0138	Yes	100	150	URX000204		13.22	13.09	13.00	47	94
50	0138	Yes	0169	Yes	130	100	05P00620-0066		13.22	13.09	13.00	47	108
60	0169	Yes	0211	Yes	160	75	URX000206	3	13.22	13.09	13.00	59	116
75	0211	Yes	0250	Yes	250	45	URX000248		13.22	13.09	13.00	65	154
100	0250	Yes	0312	Yes	250	45	URX000248		13.22	13.09	13.00	65	154
125	0312	Yes	0360	Yes	320	40	URX000249		18.38	16.88	24.00	107	224
150	0360	Yes	0415	Yes	400	30	URX000250		18.38	16.88	24.00	111	231
175	0415	Yes	0415	Yes	500	25	URX000251		18.38	16.88	24.00	111	231

* Large A1000 chassis have a built-in DC link reactor equivalent to 3% line reactance. 240V ratings are shown with 3% added AC reactance for 6% total.

HP	Drive Model Number: CIMR-AU2A				Nominal 5% Impedance*								
					Reactor Rated Current (A)	Inductance (μH)	Enclosed Yaskawa Part Number	Dimensions (in.)			Weight (lb)	Watt Loss (W)	
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W			
0.5	0004	No	0004	No	2	12000	05P00620-0015	1	8.00	6.00	8.00	11	7.5
0.75	0004	No	0004	No	4	6500	05P00620-0021		8.00	6.00	8.00	11	20
1	0006	No	0006	No	4	6500	05P00620-0021		8.00	6.00	8.00	11	20
1.5	0006	No	0008	No	8	3000	05P00620-0028		8.00	6.00	8.00	15	29
2	0008	No	0008	No	8	3000	05P00620-0028		8.00	6.00	8.00	15	29
3	0010	No	0012	No	12	2500	05P00620-0033		8.00	6.00	8.00	17	31
5	0018	No	0021	No	18	1500	05P00620-0037		8.00	6.00	8.00	15	43
7.5	0021	No	0030	No	25	1200	05P00620-0042		13.22	13.09	13.00	32	52
10	0030	No	0040	No	35	800	05P00620-0047	2	13.22	13.09	13.00	34	54
15	0040	No	0056	No	45	700	05P00620-0051		13.22	13.09	13.00	46	62
20	0056	No	0069	No	55	500	05P00620-0055		13.22	13.09	13.00	45	67
25	0069	No	0081	No	80	400	05P00620-0059		13.22	13.09	13.00	51	86
30	0081	No	--	--	80	400	05P00620-0059		13.22	13.09	13.00	51	86
30	--	--	0110	Yes	80	200	05P00620-0058		13.22	13.09	13.00	43	82
40	0110	Yes	0138	Yes	100	150	URX000204		13.22	13.09	13.00	47	94
50	0138	Yes	0169	Yes	130	100	05P00620-0066		13.22	13.09	13.00	47	108
60	0169	Yes	0211	Yes	160	75	URX000206	3	13.22	13.09	13.00	59	116
75	0211	Yes	0250	Yes	250	45	URX000248		13.22	13.09	13.00	65	154
100	0250	Yes	0312	Yes	250	45	URX000248		13.22	13.09	13.00	65	154
125	0312	Yes	0360	Yes	320	40	URX000249		18.38	16.88	24.00	107	224
150	0360	Yes	0415	Yes	400	30	URX000250		18.38	16.88	24.00	111	231
175	0415	Yes	0415	Yes	500	25	URX000251		18.38	16.88	24.00	111	231

* Large A1000 chassis have a built-in DC link reactor equivalent to 3% line reactance. 240V ratings are shown with 3% added AC reactance for 6% total.

Power Accessories Selection

AC Line / Load Reactors (continued)

480V Class

HP	Drive Model Number: CIMR-AU4A				Nominal 3% Impedance*						
					Reactor Rated Current (A)	Inductance (μ H)	Enclosed Yaskawa Part Number	Dimensions (in.)			
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W	H
0.5	0002	No	0002	No	1	18000	URX000242	1	8.00	6.00	8.00
0.75	0002	No	0002	No	2	12000	05P00620-0015		8.00	6.00	8.00
1	0002	No	0004	No	2	12000	05P00620-0015		8.00	6.00	8.00
1.5	0004	No	0004	No	4	6500	05P00620-0021		8.00	6.00	8.00
2	0004	No	0004	No	4	6500	05P00620-0021		8.00	6.00	8.00
3	0005	No	0005	No	8	3000	05P00620-0028		8.00	6.00	8.00
5	0009	No	0011	No	8	3000	05P00620-0028		8.00	6.00	8.00
7.5	0011	No	0018	No	12	2500	05P00620-0033		8.00	6.00	8.00
10	0018	No	0018	No	18	1500	05P00620-0037		8.00	6.00	8.00
15	0023	No	0031	No	25	1200	05P00620-0042	2	13.22	13.09	13.00
20	0031	No	0038	No	35	800	05P00620-0047		13.22	13.09	13.00
25	0038	No	0044	No	35	800	05P00620-0047		13.22	13.09	13.00
30	0044	No	--	--	45	700	05P00620-0051		13.22	13.09	13.00
30	--	--	0058	Yes	45	300	05P00620-0050		13.22	13.09	13.00
40	0058	Yes	0072	Yes	55	250	05P00620-0054		13.22	13.09	13.00
50	0072	Yes	0088	Yes	80	200	05P00620-0058		13.22	13.09	13.00
60	0088	Yes	0088	Yes	80	200	05P00620-0058		13.22	13.09	13.00
75	0103	Yes	0103	Yes	100	150	URX000204		13.22	13.09	13.00
100	0139	Yes	0165	Yes	130	100	05P00620-0066		13.22	13.09	13.00
125	0165	Yes	0165	Yes	160	75	URX000206	3	13.22	13.09	13.00
150	0208	Yes	0208	Yes	200	55	05P00620-0077		13.22	13.09	13.00
200	0250	Yes	0250	Yes	250	45	URX000248		13.22	13.09	13.00
250	0296	Yes	0362	Yes	320	40	URX000249		18.38	16.88	24.00
300	0362	Yes	0414	Yes	400	30	URX000250	4	18.38	16.88	24.00
350	0414	Yes	0515	Yes	500	25	URX000251		18.38	16.88	24.00
400	0515	Yes	0675	Yes	500	25	URX000251		18.38	16.88	24.00
450	0675	Yes	0675	Yes	600	20	URX000252		26.55	24.90	47.00
500	0675	Yes	0675	Yes	600	20	URX000252	5	26.55	24.90	47.00
600	0675	Yes	0930	Yes	750	15	URX000253		30.55	24.90	47.00
660	0930	Yes	0930	Yes	750	15	URX000253		30.55	24.90	47.00
700	0930	Yes	0930	Yes	900	13	URX000254		30.55	24.90	47.00
750	0930	Yes	1200	Yes	900	13	URX000254		30.55	24.90	47.00
800	1200	Yes	1200	Yes	1000	11	URX000244		30.55	24.90	47.00
900	1200	Yes	1200	Yes	1200	9	URX000246		30.55	24.90	47.00
1000	1200	Yes	1200	Yes	1200	9	URX000246		30.55	24.90	47.00

* Large A1000 chassis have a built-in DC link reactor equivalent to 3% line reactance. 480V ratings are shown with 1.5% added AC reactance for 4.5% total.

AC Line / Load Reactors (continued)

480V Class

HP	Drive Model Number: CIMR-AU4A				Nominal 5% Impedance*								
					Reactor Rated Current (A)	Inductance (μ H)	Enclosed Yaskawa Part Number	Dimensions (in.)			Weight (lb)	Watt Loss (W)	
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W			
0.5	0002	No	0002	No	1	36000	URX000241	1	8.00	6.00	8.00	11	11.9
0.75	0002	No	0002	No	2	20000	05P00620-0016		8.00	6.00	8.00	11	11.3
1	0002	No	0004	No	2	20000	05P00620-0016		8.00	6.00	8.00	11	11.3
1.5	0004	No	0004	No	4	12000	05P00620-0023		8.00	6.00	8.00	13	21
2	0004	No	0004	No	4	12000	05P00620-0023		8.00	6.00	8.00	13	21
3	0005	No	0005	No	8	7500	URX000226		8.00	6.00	8.00	20	28
5	0009	No	0011	No	8	5000	05P00620-0029		8.00	6.00	8.00	18	25.3
7.5	0011	No	0018	No	12	4200	05P00620-0034		8.00	6.00	8.00	25	41
10	0018	No	0018	No	18	2500	05P00620-0038	2	13.22	13.09	13.00	34	43
15	0023	No	0031	No	25	1800	05P00620-0043		13.22	13.09	13.00	38	61
20	0031	No	0038	No	35	1200	05P00620-0048		13.22	13.09	13.00	48	54
25	0038	No	0044	No	35	1200	05P00620-0048		13.22	13.09	13.00	48	54
30	0044	No	--	--	45	1200	05P00620-0052		13.22	13.09	13.00	57	65
30	--	--	0058	Yes	45	700	05P00620-0051		13.22	13.09	13.00	46	62
40	0058	Yes	0072	Yes	55	500	05P00620-0055		13.22	13.09	13.00	45	67
50	0072	Yes	0088	Yes	80	400	05P00620-0059		13.22	13.09	13.00	51	86
60	0088	Yes	0088	Yes	80	400	05P00620-0059	3	13.22	13.09	13.00	51	86
75	0103	Yes	0103	Yes	100	300	05P00620-0062		13.22	13.09	13.00	55	84
100	0139	Yes	0165	Yes	130	200	05P00620-0067		13.22	13.09	13.00	61	180
125	0165	Yes	0165	Yes	160	150	05P00620-0073		13.22	13.09	13.00	68	149
150	0208	Yes	0208	Yes	200	110	05P00620-0078		13.22	13.09	13.00	72	168
200	0250	Yes	0250	Yes	250	90	05P00620-0083		18.38	16.88	24.00	107	231
250	0296	Yes	0362	Yes	320	75	05P00620-0088		18.38	16.88	24.00	129	264
300	0362	Yes	0414	Yes	400	60	05P00620-0092		18.38	16.88	24.00	145	333
350	0414	Yes	0515	Yes	500	50	05P00620-0096	4	26.55	24.90	47.00	262	340
400	0515	Yes	0675	Yes	500	50	05P00620-0096		26.55	24.90	47.00	262	340
450	0675	Yes	0675	Yes	600	40	05P00620-0100		26.55	24.90	47.00	319	414
500	0675	Yes	0675	Yes	600	40	05P00620-0100		26.55	24.90	47.00	319	414
600	0675	Yes	0930	Yes	750	29	05P00620-0104	5	30.55	24.90	47.00	349	630
660	0930	Yes	0930	Yes	750	29	05P00620-0104		30.55	24.90	47.00	349	630
700	0930	Yes	0930	Yes	900	25	URX000255		30.55	24.90	47.00	529	1020
750	0930	Yes	1200	Yes	900	25	URX000255		30.55	24.90	47.00	529	1020
800	1200	Yes	1200	Yes	1000	22	URX000245		30.55	24.90	47.00	567	1090
900	1200	Yes	1200	Yes	1200	19	URX000247		30.55	24.90	47.00	599	1130
1000	1200	Yes	1200	Yes	1200	19	URX000247		30.55	24.90	47.00	599	1130

* Large A1000 chassis have a built-in DC link reactor equivalent to 3% line reactance. 480V ratings are shown with 3% added AC reactance for 6% total.

Power Accessories Selection

AC Line / Load Reactors (continued)

600V Class

HP	Drive Model Number: CIMR-AU5A				Nominal 3% Impedance*								
					Rated AC Current (A)	Inductance (μH)	Enclosed Yaskawa Part Number	Dimensions (in.)			Weight (lb)	Watt Loss (W)	
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W			
0.5	0003	No	0003	No	1	36000	URX000241	1	8.00	6.00	8.00	11	11.9
0.75	0003	No	0003	No	2	20000	05P00620-0016		8.00	6.00	8.00	11	11.3
1	0003	No	0003	No	2	20000	05P00620-0016		8.00	6.00	8.00	11	11.3
1.5	0003	No	0004	No	2	20000	05P00620-0016		8.00	6.00	8.00	11	11.3
2	0003	No	0004	No	4	9000	05P00620-0022		8.00	6.00	8.00	12	20
3	0004	No	0006	No	4	9000	05P00620-0022		8.00	6.00	8.00	12	20
5	0006	No	0009	No	8	5000	05P00620-0029		8.00	6.00	8.00	18	25.3
7.5	0009	No	0011	No	12	2500	05P00620-0033		8.00	6.00	8.00	17	31
10	0011	No	0017	No	12	2500	05P00620-0033		8.00	6.00	8.00	17	31
15	0017	No	0022	No	18	1500	05P00620-0037		8.00	6.00	8.00	19	43
20	0022	No	0027	No	25	1200	05P00620-0042	2	13.22	13.09	13.00	32	52
25	0027	No	0032	No	25	1200	05P00620-0042		13.22	13.09	13.00	32	52
30	0032	No	--	--	35	800	05P00620-0047		13.22	13.09	13.00	34	54
30	--	--	0041	Yes	35	400	05P00620-0046		13.22	13.09	13.00	32	49
40	0041	Yes	0052	Yes	45	300	05P00620-0050		13.22	13.09	13.00	41	54
50	0052	Yes	0062	Yes	55	250	05P00620-0054		13.22	13.09	13.00	42	64
60	0062	Yes	0077	Yes	80	200	05P00620-0058		13.22	13.09	13.00	43	82
75	0077	Yes	0099	Yes	80	200	05P00620-0058		13.22	13.09	13.00	43	82
100	0099	Yes	0125	Yes	100	150	URX000204		13.22	13.09	13.00	47	94
125	0125	Yes	0145	Yes	130	100	05P00620-0066		13.22	13.09	13.00	47	108
150	0145	Yes	0192	Yes	160	75	URX000206		13.22	13.09	13.00	59	116
200	0192	Yes	0242	Yes	200	55	05P00620-0077		13.22	13.09	13.00	56	124
250	0242	Yes	--	--	250	45	05P00620-0077		13.22	13.09	13.00	65	154

* Large A1000 chassis have a built-in DC link reactor equivalent to 3% line reactance. 600V ratings are shown with 1.5% added AC reactance for 4.5% total.

AC Line / Load Reactors (continued)

600V Class

HP	Drive Model Number: CIMR-AU5A				Nominal 5% Impedance*								
					Rated AC Current (A)	Inductance (μH)	Enclosed Yaskawa Part Number	Dimensions (in.)			Weight (lb)	Watt Loss (W)	
	Normal Duty	Built-in DC Link Reactor	Heavy Duty	Built-in DC Link Reactor				Figure	L	W			
0.5	0003	No	0003	No	1	18000	URX000242	1	8.00	6.00	8.00	11	9.6
0.75	0003	No	0003	No	2	32000	URX000227		8.00	6.00	8.00	11	16
1	0003	No	0003	No	2	32000	URX000227		8.00	6.00	8.00	11	16
1.5	0003	No	0004	No	2	32000	URX000227		8.00	6.00	8.00	11	16
2	0003	No	0004	No	4	12000	05P00620-0023		8.00	6.00	8.00	13	21
3	0004	No	0006	No	4	12000	05P00620-0023		8.00	6.00	8.00	13	21
5	0006	No	0009	No	8	7500	URX000226		8.00	6.00	8.00	20	28
7.5	0009	No	0011	No	12	4200	05P00620-0034		8.00	6.00	8.00	25	41
10	0011	No	0017	No	12	4200	05P00620-0034	2	8.00	6.00	8.00	25	41
15	0017	No	0022	No	18	2500	05P00620-0038		13.22	13.09	13.00	34	43
20	0022	No	0027	No	25	1800	05P00620-0043		13.22	13.09	13.00	38	61
25	0027	No	0032	No	25	1800	05P00620-0043		13.22	13.09	13.00	38	61
30	0032	No	--	--	35	1200	05P00620-0048		13.22	13.09	13.00	48	54
30	--	--	0041	Yes	35	800	05P00620-0047		13.22	13.09	13.00	34	54
40	0041	Yes	0052	Yes	45	700	05P00620-0051		13.22	13.09	13.00	46	62
50	0052	Yes	0062	Yes	55	500	05P00620-0055		13.22	13.09	13.00	45	67
60	0062	Yes	0077	Yes	80	400	05P00620-0059	3	13.22	13.09	13.00	51	86
75	0077	Yes	0099	Yes	80	400	05P00620-0059		13.22	13.09	13.00	51	86
100	0099	Yes	0125	Yes	100	300	05P00620-0062		13.22	13.09	13.00	55	84
125	0125	Yes	0145	Yes	130	200	05P00620-0067		13.22	13.09	13.00	61	180
150	0145	Yes	0192	Yes	160	150	05P00620-0073		13.22	13.09	13.00	68	149
200	0192	Yes	0242	Yes	200	110	05P00620-0078	3	13.22	13.09	13.00	72	168
250	0242	Yes	--	--	250	90	05P00620-0083		18.38	16.88	24.00	107	231


* Large A1000 chassis have a built-in DC link reactor equivalent to 3% line reactance. 600V ratings are shown with 3% added AC reactance for 6% total.

Power Accessories Selection



EMC Filters

EMC filters are used to reduce high frequency noise on the input (line side) conductors to comply with CE (European) directives. In addition, certification of the Functional Safety (Safe Torque Off) feature requires a CE compliant installation.

Connection Diagram

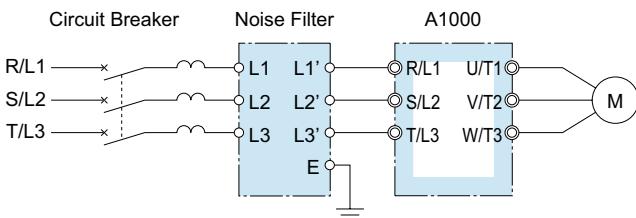




Manufactured by EPCOS (UL Listed)

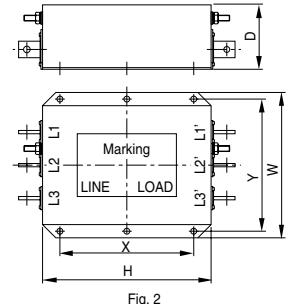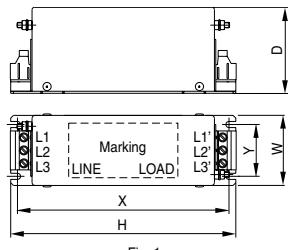

EPCOS Dimensions

Yaskawa Part Number	Dimensions (in.)					Weight (lb)	Fig.
	W	D	H	X	Y		
UFI000177	2.02	2.48	6.50	1.50	6.10	1.3	1
UFI000178	1.83	2.76	9.09	1.50	8.70	2	1
UFI000179	1.83	3.27	9.09	1.50	8.70	2.4	1
UFI000180	2.28	3.54	10.43	1.38	10.04	3.9	1
UFI000181	2.28	3.54	10.43	1.38	10.04	3.9	1
UFI000182	2.28	5.57	10.43	1.38	10.04	6	1
UFI000183	3.15	5.31	11.42	2.36	10.04	9.3	1
UFI000184	3.54	5.91	11.42	2.56	10.04	10.8	1
UFI000185	3.54	5.91	10.63	2.56	10.04	11.7	1
UFI000186	7.48	4.53	11.81	6.50	9.45	33.1	2
UFI000187	10.24	4.57	11.81	9.25	9.45	46.3	2
UFI000188	10.24	4.57	11.81	9.25	9.45	46.3	2
UFI000189	10.24	4.57	13.78	9.25	11.42	48.5	2
UFI000190	11.81	6.54	13.78	10.83	11.42	61.7	2
UFI000191	11.81	9.84	15.75	10.83	13.39	75	2
UFI000192	15.16	12.60	25.59	13.98	22.05	232	2

Manufactured by Schaffner

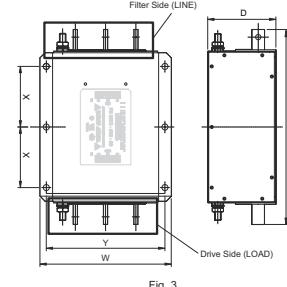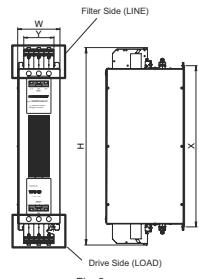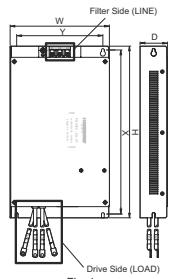

Schaffner Dimensions

Yaskawa Part Number	Dimensions (in.)					Weight (lb)	Fig.
	W	D	H	X	Y		
FS5972-10-07	5.6	1.8	13	4.5	12.3	2.6	1
FS5972-18-07	5.6	1.8	13	4.5	12.3	2.9	1
FS5972-35-07	8.1	2	14	6.9	13.2	4.6	1
FS5972-60-07	9.3	2.6	16.1	8.1	15.4	8.8	1
FS5972-100-35	3.5	5.9	13	2.6	10	7.5	2
FS5972-170-40	4.7	6.7	17.8	4	14.4	13.2	2
FS5972-250-37	5.1	9.5	24	3.5	19.6	25.8	2
FS5972-410-99	10.2	4.5	15.2	9.3	4.7	23.1	3
UFI000032	10.2	5.3	15.2	9.3	4.7	24.3	3
UFI000033	11.8	6.3	28.2	10.8	8.3	31.5	3

EMC Filters (continued)

240V Class

HP	Drive Model Number CIMR-AU2A		Noise Filter by EPCOS			Noise Filter by Schaffner EMC		
	Normal Duty	Heavy Duty	Yaskawa Part Number	Qty.	Rated Current (A)	Yaskawa Part Number	Qty.	Rated Current (A)
0.5	0004	0004	UFI000177	1	8	FS5972-10-07	1	10
0.75	0004	0004	UFI000177	1	8	FS5972-10-07	1	10
1	0006	0006	UFI000177	1	8	FS5972-10-07	1	10
1.5	0006	0008	UFI000178	1	16	FS5972-10-07	1	10
2	0008	0008	UFI000178	1	16	FS5972-10-07	1	10
3	0010	0012	UFI000179	1	25	FS5972-18-07	1	18
5	0018	0021	UFI000180	1	36	FS5972-35-07	1	35
7.5	0021	0030	UFI000180	1	36	FS5972-35-07	1	35
10	0030	0040	UFI000182	1	66	FS5972-60-07	1	60
15	0040	0056	UFI000182	1	66	FS5972-60-07	1	60
20	0056	0069	UFI000183	1	90	FS5972-100-35	1	100
25	0069	0081	UFI000184	1	120	FS5972-100-35	1	100
30	0081	0110	UFI000185	1	150	FS5972-170-40	1	170
40	0110	0138	UFI000186	1	250	FS5972-170-40	1	170
50	0138	0169	UFI000186	1	250	FS5972-250-37	1	250
60	0169	0211	UFI000186	1	250	FS5972-250-37	1	250
75	0211	0250	UFI000187	1	320	FS5972-410-99	1	410
100	0250	0312	UFI000188	1	400	FS5972-410-99	1	410
125	0312	0360	UFI000189	1	600	UFI000032	1	600
150	0360	0415	UFI000189	1	600	UFI000032	1	600
175	0415	-	UFI000189	1	600	UFI000032	1	600

Note: Schaffner filters must be used when IEC/EN61508 (functional safety) conformance is required with the Safe-Torque-Off function.

480V Class

HP	Drive Model Number CIMR-AU4A		Noise Filter by EPCOS			Noise Filter by Schaffner EMC		
	Normal Duty	Heavy Duty	Yaskawa Part Number	Qty.	Rated Current (A)	Yaskawa Part Number	Qty.	Rated Current (A)
0.75	0002	0002	UFI000177	1	8	FS5972-10-07	1	10
2	0004	0004	UFI000178	1	16	FS5972-10-07	1	10
3	0005/0007	0005/0007	UFI000178	1	16	FS5972-10-07	1	10
5	0009	0009/0011	UFI000179	1	25	FS5972-18-07	1	18
7.5	0011	0018	UFI000180	1	36	FS5972-35-07	1	35
10	0018	0023	UFI000180	1	36	FS5972-35-07	1	35
15	0023	0031	UFI000180	1	36	FS5972-35-07	1	35
20	0031	0038	UFI000181	1	50	FS5972-60-07	1	60
25	0038	0044	UFI000182	1	66	FS5972-60-07	1	60
30	0044	0058	UFI000182	1	66	FS5972-60-07	1	60
40	0058	0072	UFI000183	1	90	FS5972-100-35	1	100
50	0072	0088	UFI000184	1	120	FS5972-100-35	1	100
60	0088	0103	UFI000185	1	150	FS5972-170-40	1	170
75	0103	0139	UFI000186	1	250	FS5972-170-40	1	170
100	0139	0165	UFI000186	1	250	FS5972-170-40	1	170
125	0165	0208	UFI000186	1	250	FS5972-250-37	1	250
150	0208	0250	UFI000188	1	400	FS5972-410-99	1	410
200	0250	0296	UFI000188	1	400	FS5972-410-99	1	410
250	0296	0362	UFI000188	1	400	FS5972-410-99	1	410
300	0362	0414	UFI000189	1	600	UFI000032	1	600
350	0414	0515	UFI000189	1	600	UFI000032	1	600
450	0515	0675	UFI000190	1	1000	UFI000033	1	800
550	0675	0930	UFI000191	1	1600	UFI000032	2	600
800	0930	1200	UFI000192	1	2500	UFI000033	2	800
1000	1200	-	UFI000192	1	2500	UFI000033	2	800

Note: Schaffner filters must be used when IEC/EN61508 (functional safety) conformance is required with the Safe-Torque-Off function.


Power Accessories Selection

Dynamic Braking Options


Dynamic braking provides a method to dissipate energy from regenerative events such as high inertia, fast decelerations or overhauling applications (e.g. downhill conveyors or eccentric loads). A dynamic braking system consists of a brake transistor and a brake resistor. A1000 drives through 50HP (normal duty) have built-in brake chopper transistors. A separately mounted Braking Unit (separate brake transistor) is available for larger drives.

A drive mounted 3% duty cycle resistor is available for 240V and 480V A1000 drives through 7.5HP normal duty (and 5HP heavy duty). For larger drives, higher duty cycles, and 600V applications, separately mounted resistor assemblies are available.


Connection Diagram

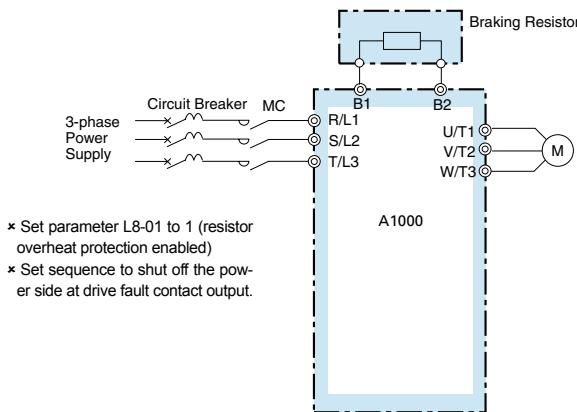


Connection Diagram A

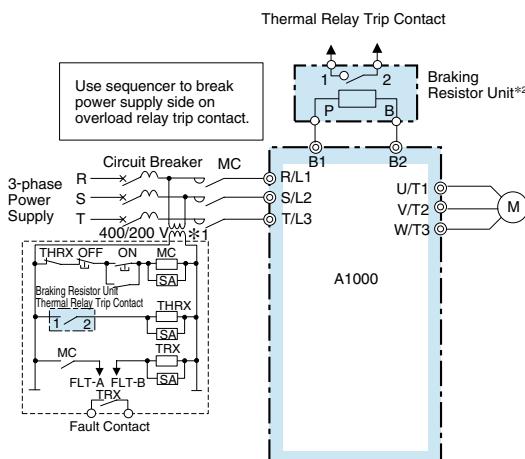

Connection Diagram B

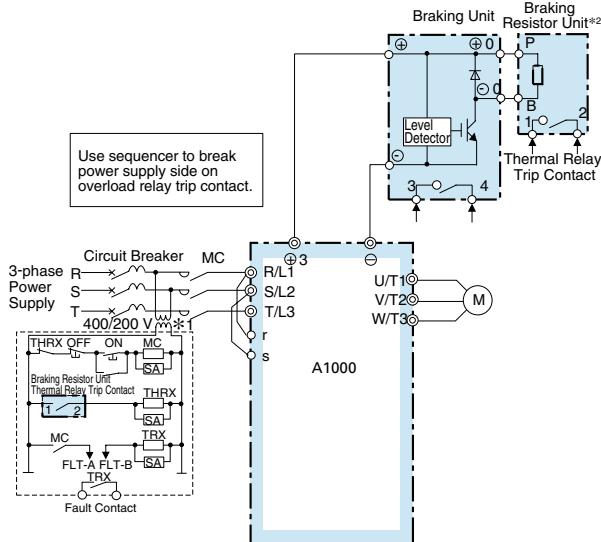

Connection Diagram C

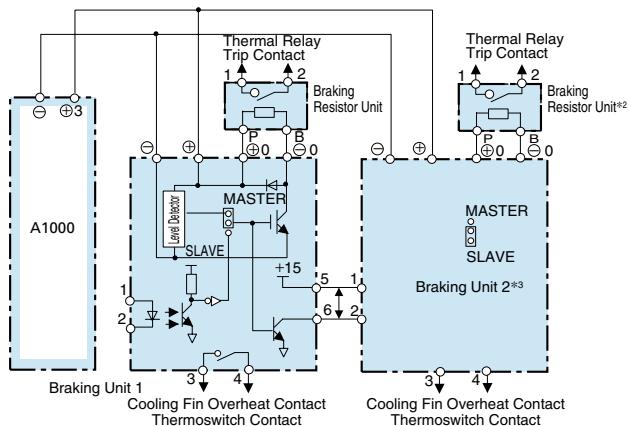

Connection Diagram D

*1: 240V class drives do not require control circuit transformer.

*2: Disable stall prevention during deceleration by setting L3-04 = 0 when using a Braking Resistor Unit. The motor may not stop within the deceleration time if this setting is not changed.

*3: When using more than one parallel-connected braking unit, connect and select connectors: Braking units have a MASTER/SLAVE selection connector. Select MASTER side only for braking unit1 and select SLAVE sides for other braking units.

Note: When connecting a separately-installed type braking unit (model CDBR) to drives with built-in braking transistor (240V/480V 50HP or less), connect the B1 terminal of the drive to the positive terminal of the braking resistor unit and connect the negative terminal of the drive to the negative terminal of the braking resistor unit. The B2 terminal is not used in this case.

Dynamic Braking Options (continued)

Braking Unit




Braking Unit [CDBR series]


CDBR-[]	Heat Loss (W)
2015B	32
2022B	38
2110B	64
4030B	54
4045B	59
4220B	71

Dimensions


CDBR-2015B, -2022B, -4030B, -4045B

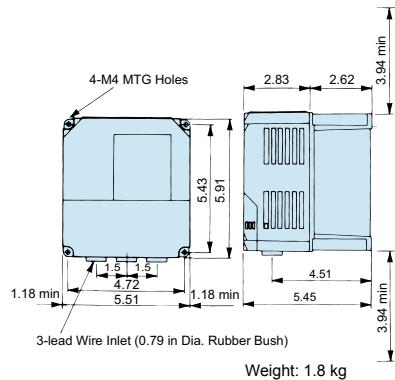

CDBR-2110B

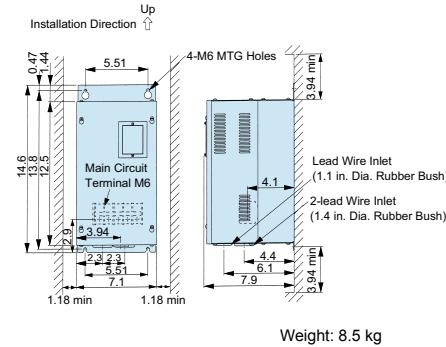

CDBR-4220B

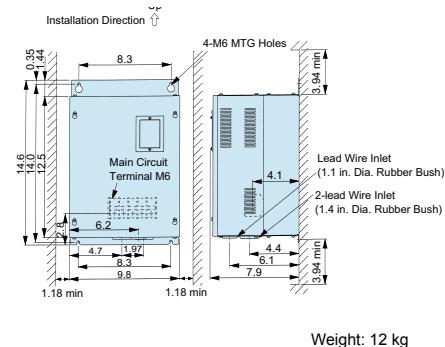


Braking Resistor




3% Braking Resistor (R75XX)

An attachment (option) is required for installation of the braking resistor.

Dimensions (in.)

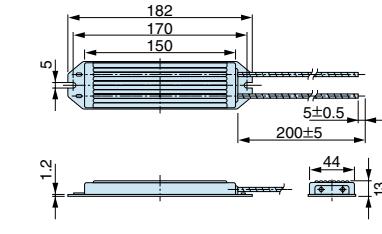

Attachment for Braking Resistor

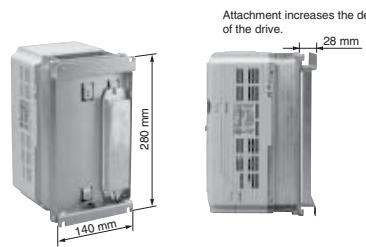


Braking Resistor Unit (Stand-alone)



Stand-alone

Dimensions (in.)

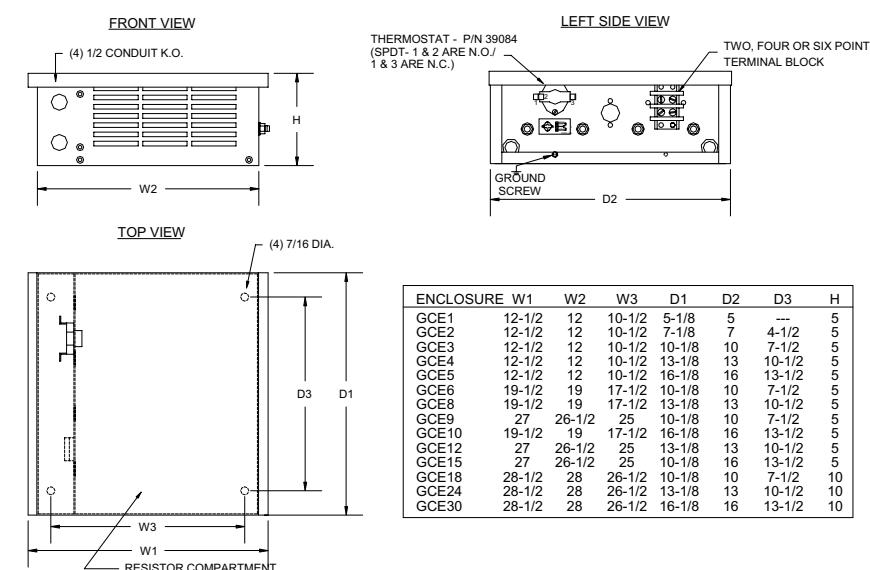

Power Accessories Selection

Dynamic Braking Options (continued)

240V Class

Max. Motor (HP)	ND/HD	A1000	Braking Unit		Braking Resistor (Duty Factor: 3% ED, 10 s max)				Braking Resistor Unit (Duty Factor: 10% ED, 10 s max)					Min.* Connection Resistance (Ω)		
					No Fuse											
			Model CIMR-AU2A	Model CDBR-[]	Qty.	Yaskawa Part Number	Resistance (Ω)	Qty.	Diag.	Braking Torque (%)	Yaskawa Part Number	Resistor Specs (Ω)	Qty.	Diag.	Braking Torque (%)	
0.75	HD	0004	Built-in	R7505	200	1	A	220	URS000275	170	1	B	150	48	16	
	ND	0004						125	URS000262	250	1	B	100	48		
1	HD	0006						125	URS000276	125	1	B	150	48		
	ND	0006						125	URS000264	125	1	B	100	48		
2	HD	0008				100	1	A	125	URS000277	85	1	B	150	48	16
	ND	0008							125	URS000265	95	1	B	100		
	HD	0010							125	URS000278	63	1	B	150		
3	ND	0010				70	1	A	120	URS000266	63	1	B	100	48	16
	HD	0012							120	URS000279	42	1	B	150		
	ND	0012				62	1	A	100	URS000267	38	1	B	100	16	
	HD	0018							100	URS000280	25	1	B	150		
5	ND	0018				62	1	A	80	URS000267	38	1	B	100	16	
	HD	0021							80	URS000280	25	1	B	150		
7.5	ND	0021				62	2	A	110	URS000268	26	1	B	100	16	
	HD	0030							-	URS000280	16.8	1	B	150		
10	ND	0030				-	-	-	-	URS000269	19	1	B	100	16	
	HD	0040							-	URS000282	12.6	1	B	150	9.6	
15	ND	0040				-	-	-	-	URS000270	12.6	1	B	100	9.6	
	HD	0056							-	URS000283	8.4	1	B	150		
20	ND	0056				-	-	-	-	URS000271	9.6	1	B	100	9.6	
	HD	0069							-	URS000284	6.3	1	B	150		
25	ND	0069				-	-	-	-	URS000272	7.5	1	B	100	9.6	
	HD	0081							-	URS000285	5	1	B	150		
30	ND	0081				-	-	-	-	URS000273	6.3	1	B	100	9.6	
	HD	0110							-	URS000286	4.2	1	B	150	6.4	
40	ND	0110				-	-	-	-	URS000274	4.9	1	B	100	6.4	
	HD	0138							-	URS000286	4.2	1	B	150		
50	ND	0138				-	-	-	-	URS000117	4.2	1	B	100	6.4	
	HD	0169	2110B	1	-				-	URS000100	2.1	1	C	150	1.6	
60	ND	0169	2110B	1	-	-	-	-	-	URS000100	2.1	1	C	150	1.6	
	HD	0211														
75	ND	0211	2110B	1	-	-	-	-	-	URS000096	1.6	1	C	150	1.6	
	HD	0250														
100	ND	0250	2110B & 2022B	1 each	-	-	-	-	-	URS000096 & URS000128	1.6 & 6.8	1 each	D	150	1.6 & 6.4	
	HD	0312														
125	ND	0312	2110B & 2022B	1 & 2	-	-	-	-	-	URS000096 & URS000127	1.6 & 6.8	1 each	D	150	1.6 & 6.4	
	HD	0360														
150	ND	0360	2110B	2	-	-	-	-	-	URS000097	1.6	1	D	150	1.6	
	HD	0415														
175	ND	0415	2110B	2	-	-	-	-	-	URS000097	1.6	1	D	150	1.6	

* The value shown for the minimum connection resistance is that for a single braking unit. Select a resistance value higher than the connectable resistance value and enough to generate the required braking torque.

Note: 1. The rated output current of the drive output amps should be equal to or greater than the motor rated current.

2. An attachment (option) is required for installation of the braking resistor (Part Number R75XX). Contact Yaskawa for details.

Dynamic Braking Options (continued)

480V Class

Max. Motor (HP)	ND/ HD	A1000		Braking Unit		Braking Resistor (Duty Factor: 3% ED, 10 s max)					Braking Resistor Unit (Duty Factor: 10% ED, 10 s max)					Min.* Connection Resistance (Ω)	
		Model CIMR- AU4A	Model CDBR- AU4A	Qty.		No Fuse			Yaskawa Part Number	Resistance (Ω)	Qty.	Diag.	Braking Torque (%)	Yaskawa Part Number	Resistor Specs (Ω)	Qty.	Diag.
0.75	HD 0002					R7508	750	1	A	230	URS000252	500	1	B	150	96	
	ND 0002									130	URS000240	750	1	B	100	96	
2	HD 0004					R7508	750	1	A	130	URS000253	250	1	B	150	96	
	ND 0004					R7508	750				URS000241	375	1	B	100	96	
3	HD 0005					R7507	400			125	URS000254	170	1	B	150	64	
	ND 0005					R7506	300	1	A	115	URS000242	250	1	B	100		64
	HD 0007					R7505	200			100	URS000254	170	1	B	150		
	ND 0007									100	URS000243	150	1	B	100	64	
	HD 0009					R7505	200	1	A	100	URS000255	100	1	B	150	32	
5	ND 0009									83	URS000243	150	1	B	100		
	HD 0011										URS000255	100	1	B	150	32	
	ND 0011					R7505	200	2	A	135	URS000244	100	1	B	100		
7.5	HD 0018					-	-	-	-	-	URS000256	67	1	B	150		
	ND 0018					-	-	-	-	-	URS000245	75	1	B	100		
	HD 0023					-	-	-	-	-	URS000257	50	1	B	150	32	
10	ND 0023					-	-	-	-	-	URS000246	50	1	B	100	32	
	HD 0031					-	-	-	-	-	URS000258	34	1	B	150	20	
	ND 0031					-	-	-	-	-	URS000247	38	1	B	100		20
15	HD 0038					-	-	-	-	-	URS000259	25	1	B	150		
	ND 0038					-	-	-	-	-	URS000248	30	1	B	100	20	
	HD 0044					-	-	-	-	-	URS000259	25	1	B	150	19.2	
20	ND 0044					-	-	-	-	-	URS000249	25	1	B	100		19.2
	HD 0058					-	-	-	-	-	URS000260	17	1	B	150		
	ND 0058					-	-	-	-	-	URS000250	19	1	B	100		19.2
25	HD 0072					-	-	-	-	-	URS000261	12.6	1	B	150		19.2
	ND 0072					-	-	-	-	-	URS000251	15	1	B	100	19.2	
	HD 0088	4045B	2	-	-	-	-	-	-	-	URS000151	18	1	D	150	12.8	
30	ND 0088	4045B	1	-	-	-	-	-	-	-	URS000144	13.6					12.8
	HD 0103	4045B	2	-	-	-	-	-	-	-	URS000151	18	1	D	150	12.8	
	ND 0103	4045B	2	-	-	-	-	-	-	-	URS000143	13.6	1	D	150	12.8	
40	HD 0139	4220B	1	-	-	-	-	-	-	-	URS000119	4.2	1	D	150	3.2	
	ND 0165	4220B	1	-	-	-	-	-	-	-	URS000119	4.2	1	D	150	3.2	
	HD 0208	4220B	1	-	-	-	-	-	-	-	URS000165	3.2	1	D	150	3.2	
50	ND 0208	4220B	1	-	-	-	-	-	-	-	URS000165 & URS000142	3.2 & 13.6	1 each	D	150	3.2 & 12.8	
	HD 0250	4220B & 4045B	1 Each	-	-	-	-	-	-	-	URS000165 & URS000143	3.2 & 13.6	1 each	D	150	3.2 & 12.8	
	ND 0296	4220B & 4045B	1 & 2	-	-	-	-	-	-	-	URS000166	3.2	1	D	150	3.2 & 12.8	
100	ND 0362	4220B	2	-	-	-	-	-	-	-	URS000166	3.2	1	D	150	3.2	
	HD 0414	4220B	2	-	-	-	-	-	-	-	URS000166	3.2	1	D	150	3.2	
	ND 0414	4220B	2	-	-	-	-	-	-	-	URS000166	3.2	1	D	150	3.2	
350	HD 0515	4220B	3	-	-	-	-	-	-	-	URS000167	3.2	1	D	150	3.2	
	ND 0515	4220B	3	-	-	-	-	-	-	-	URS000167	3.2	1	D	150	3.2	
	HD 0675	4220B	3	-	-	-	-	-	-	-	URS000167	3.2	1	D	150	3.2	
400	ND 0515	4220B	3	-	-	-	-	-	-	-	URS000167	3.2	1	D	150	3.2	
	HD 0675	4220B	3	-	-	-	-	-	-	-	URS000167	3.2	1	D	150	3.2	
	ND 0675	4220B	3	-	-	-	-	-	-	-	URS000167	3.2	1	D	150	3.2	
500	HD 0675	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
	ND 0675	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
	HD 0930	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
550	ND 0930	4220B	5	-	-	-	-	-	-	-	URS000166 & URS000167	3.2 each	1 each	D	150	3.2	
	HD 0930	4220B	5	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	
	ND 0930	4220B	6	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	
600	HD 0930	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
	ND 0930	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
	HD 1200	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
700	ND 0930	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
	HD 1200	4220B	4	-	-	-	-	-	-	-	URS000166	3.2	2	D	150	3.2	
	ND 0930	4220B	5	-	-	-	-	-	-	-	URS000166 & URS000167	3.2 each	1 each	D	150	3.2	
800	HD 1200	4220B	6	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	
	ND 1200	4220B	6	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	
	HD 1200	4220B	6	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	
900	ND 1200	4220B	6	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	
	HD 1200	4220B	6	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	
1000	ND 1200	4220B	6	-	-	-	-	-	-	-	URS000167	3.2	2	D	150	3.2	

* The value shown for the minimum connection resistance is that for a single braking unit. Select a resistance value higher than the connectable resistance value and enough to generate the required braking torque.

Note: 1. The rated output current of the drive output amps should be equal to or greater than the motor rated current.

2. An attachment (option) is required for installation of the braking resistor (Part Number R75XX). Contact Yaskawa for details.

Power Accessories Selection

Dynamic Braking Options (continued)

600V Class

Max. Motor (HP)	ND/HD	A1000	Braking Unit		Braking Resistor (Duty Factor: 3% ED, 10 s max)					Braking Resistor Unit (Duty Factor: 10% ED, 10 s max)					Min.* Connection Resistance (Ω)
					No Fuse										
		Model CIMR-AU5A	Model CDBR- []	Qty.	Yaskawa Part Number	Resistance (Ω)	Qty.	Diag.	Braking Torque (%)	Yaskawa Part Number	Resistor Specs (Ω)	Qty.	Diag.	Braking Torque (%)	
1	HD	0003	Built-in	-	-	-	-	-	-	URS000229	400	1	B	150	150
	ND	0003		-	-	-	-	-	-	URS000219	575	1	B	100	150
	HD	0004		-	-	-	-	-	-	URS000229	400	1	B	150	150
	ND	0003		-	-	-	-	-	-	URS000219	575	1	B	100	150
	HD	0006		-	-	-	-	-	-	URS000230	260	1	B	150	150
	ND	0004		-	-	-	-	-	-	URS000220	400	1	B	100	150
	ND	0006		-	-	-	-	-	-	URS000221	235	1	B	100	150
	HD	0009		-	-	-	-	-	-	URS000231	160	1	B	150	130
	ND	0009		-	-	-	-	-	-	URS000222	150	1	B	100	130
	HD	0011		-	-	-	-	-	-	URS000232	100	1	B	150	90
10	ND	0011		-	-	-	-	-	-	URS000223	120	1	B	100	90
	HD	0017		-	-	-	-	-	-	URS000233	80	1	B	150	65
	ND	0017		-	-	-	-	-	-	URS000224	78	1	B	100	65
	HD	0022		-	-	-	-	-	-	URS000234	52	1	B	150	44
20	ND	0022		-	-	-	-	-	-	URS000225	59	1	B	100	44
	HD	0027		-	-	-	-	-	-	URS000235	39	1	B	150	32
25	ND	0027		-	-	-	-	-	-	URS000226	47	1	B	100	32
	HD	0032		-	-	-	-	-	-	URS000239	32	1	B	150	29
30	ND	0032		-	-	-	-	-	-	URS000227	39	1	B	100	29
	HD	0041		-	-	-	-	-	-	URS000236	26	1	B	150	15
40	ND	0041		-	-	-	-	-	-	URS000157	21.25**	1	B	100	15
	HD	0052		-	-	-	-	-	-					150	15
50	ND	0052		-	-	-	-	-	-	URS000226	47	1	B	100	15
	HD	0062	5037B	2	-	-	-	-	-	URS000155	27.2	1	D	150	23.8
60	ND	0062	5037B	2	-	-	-	-	-	URS000155	27.2	1	D	150	23.8
	HD	0077			-	-	-	-	-						
75	ND	0077	5110B	1	-	-	-	-	-	URS000138	10.5	1	C	150	9.5
	HD	0099			-	-	-	-	-						
100	ND	0099	5300B	1	-	-	-	-	-	URS000118	4.2	1	C	150	3.8
	HD	0125			-	-	-	-	-						
125	ND	0125	5300B	1	-	-	-	-	-	URS000163	3.2	1	C	150	3.8
	HD	0145			-	-	-	-	-						
150	ND	0145	5300B	1	-	-	-	-	-	URS000125	5.2	1	C	150	3.8
	HD	0192			-	-	-	-	-						
200	ND	0192	5300B	1	-	-	-	-	-	URS000122	4.2	1	C	150	3.8
	HD	0242			-	-	-	-	-						
250	ND	0242	5300B	2	-	-	-	-	-	URS000163	3.2	2	D	150	3.8
	HD	0242			-	-	-	-	-						

* The value shown for the minimum connection resistance is that for a single braking unit. Select a resistance value higher than the connectable resistance value and enough to generate the required braking torque.

Note: 1. The rated output current of the drive output amps should be equal to or greater than the motor rated current.

2. An attachment (option) is required for installation of the braking resistor (Part Number R75XX). Contact Yaskawa for details.



** Make the connection on URS000157 to parallel the resistors to change resistance from 42.5 ohms to 21.25 ohms

Mechanical Installation Planning

Cabinet Mounting Choices

The protected chassis type drive can be installed either completely inside of a cabinet, or with its heatsink external, thus reducing the amount of heat inside the cabinet and allowing for a more compact enclosure. Be sure to leave enough clearance during installation for ventilation and proper cooling as well as access to wiring for maintenance.


■ External Heatsink Mounting

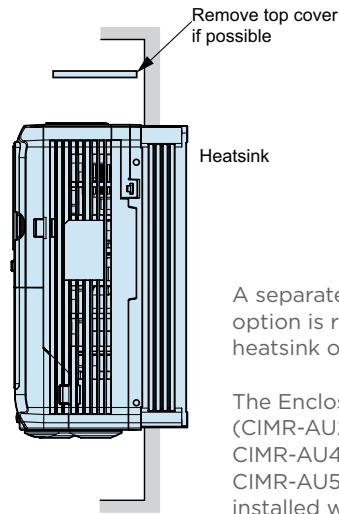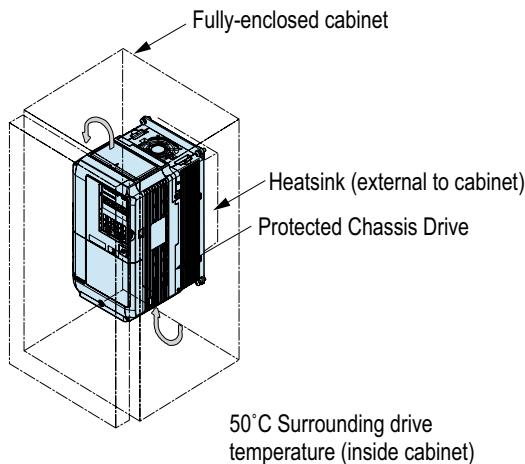


A separate mounting bracket option is required to install the heatsink outside the enclosure.

The Enclosure Panel type models (CIMR-AU2A0004 to 0081, CIMR-AU4A0002 to 0044, and CIMR-AU5A003 to 0032) can be installed with the top and bottom covers removed.

■ Ventilation Space

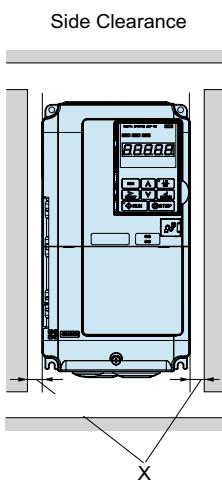

Surrounding Drive Temperature	40°C	50°C
Side Clearance (X)	0.0 in.	1.18 in.

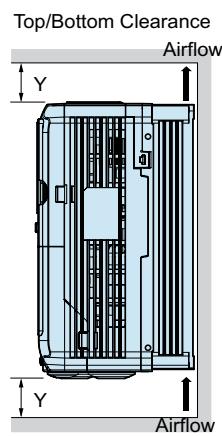


Top/Bottom Clearance (Y)	4.72 in.
--------------------------	----------

For installing the drive with capacity of AU2A0110 / AU4A0058 / AU5A0041 or greater, be sure to leave enough clearance during installation for suspension eye bolts on both sides of the unit and main circuit wiring for maintenance.

Mechanical Installation Planning


Drive Dimensions

NEMA Type 1 [IP20] Diagram

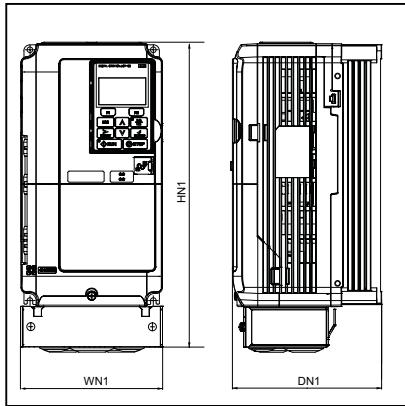

A1000 with NEMA Type 1 Kit Installed

Protected Chassis/External Heatsink Diagram

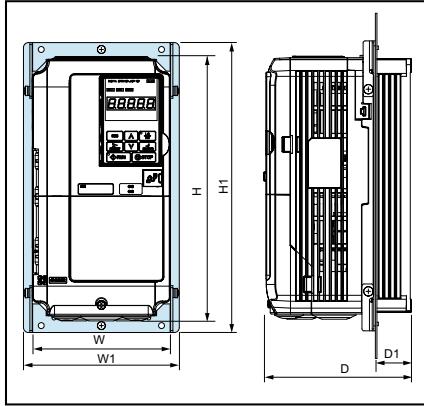

A1000 Protected Chassis / External Heatsink Configuration

Notes:

- The diagrams shown are simplified dimensional diagrams designed to display key outer dimensions of the drive. They are meant for planning purposes only. For more detailed dimensional/mounting data, please refer to the A1000 dimensional drawings on www.yaskawa.com
- Drives with NEMA Type 1 Enclosures can be converted to protected chassis by removing the top and bottom covers.
- When mounting standard drives with heatsink external (NEMA 1 backside), the following models require a separately sold bracket kit: CIMR-AU2A0004Fxx to 0081Fxx, CIMR-AU4A0002Fxx to 0044Fxx, and CIMR-AU5A0003Fxx to 0032Fxx.
- Larger standard drives include brackets that must be detached from the back and reattached at the midpoint.
- When NEMA 12 backside integrity is required, the Flange version drives (ending with Uxx) must be ordered.

240V Class

Model CIMR-AU2A □□□	Frame Size	Max. Applicable Motor Capacity (HP)	Dimensions (in.)									Weight (lb)	
			WN1	W	W1	HN1	H	H1	DN1	D	D1		
0004	1	0.75	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.3	--
0006		1.5	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.3	--
0008		2	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.5	--
0010		3	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.5	--
0012		3	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.5	--
0018	2	5	5.51	5.51	7.64	12.06	10.24	11.81	6.46	6.46	2.06	8.2	--
0021		7.5	5.51	5.51	7.64	12.06	10.24	11.81	6.46	6.46	2.06	8.2	--
0030	3	10	5.51	5.51	7.64	12.06	10.24	11.81	6.57	6.57	2.07	9.3	--
0040		15	5.51	5.51	7.64	12.06	10.24	11.81	6.57	6.57	2.07	9.3	--
0056	5	20	7.09	7.09	9.21	13.38	11.81	13.39	7.36	7.36	2.83	13.0	--
0069	6	25	8.66	8.66	11.65	15.47	13.78	16.54	7.76	7.76	2.91	20.1	--
0081		30	8.66	8.66	11.65	15.47	13.78	16.54	7.76	7.76	2.91	22.0	--
0110	7A	40	10.00	10.00	12.13	21.37	15.75	16.3	10.16	10.16	3.82	50.7	46.2
0138	8A	50	10.98	10.98	12.99	24.52	17.72	18.11	10.16	10.16	3.81	61.7	55.0
0169	10	60	12.95	12.95	15.2	30.08	21.65	22.13	11.14	11.14	4.21	90.2	81.4
0211		75	12.95	12.95	15.2	30.08	21.65	22.13	11.14	11.14	4.21	92.4	83.6
0250	11	100	17.95	17.72	22.05	37.80	27.76	28.54	12.99	12.99	5	191.8	167.6
0312		125	17.95	17.72	22.05	37.80	27.76	28.54	12.99	12.99	5	191.8	176.4
0360	12	150	19.84	19.69	23.62	45.98	31.50	32.28	13.78	13.78	5	233.7	216.1
0415		175	19.84	19.69	23.62	45.98	31.50	32.28	13.78	13.78	5	233.7	218.3

480V Class

Model CIMR-AU4A □□□□	Frame Size	Max. Applicable Motor Capacity (HP)	Dimensions (in.)								Weight (lb)		
			WN1	W	W1	HN1	H	H1	DN1	D	D1	NEMA 1	Protected Chassis
0002	1	1	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.3	--
0004		2	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.3	--
0005		3	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.3	--
0007	2	3	5.51	5.51	7.64	12.06	10.24	11.81	6.46	6.46	2.06	8.2	--
0009		5	5.51	5.51	7.64	12.06	10.24	11.81	6.46	6.46	2.06	8.2	--
0011		7.5	5.51	5.51	7.64	12.06	10.24	11.81	6.46	6.46	2.06	8.2	--
0018	3	10	5.51	5.51	7.64	12.06	10.24	11.81	6.57	6.57	2.07	9.3	--
0023		15	5.51	5.51	7.64	12.06	10.24	11.81	6.57	6.57	2.07	9.3	--
0031	4	20	7.09	7.09	9.21	13.38	11.81	13.39	6.88	6.88	2.04	12.5	--
0038	5	25	7.09	7.09	9.21	13.38	11.81	13.39	7.36	7.36	2.83	13.0	--
0044	6	30	8.66	8.66	11.65	15.47	13.78	16.54	7.76	7.76	2.91	20.1	--
0058	7B	40	10.37	10.37	12.13	18.65	15.75	16.3	10.16	10.16	3.82	50.6	50.6
0072	8B	50	11.35	11.35	12.99	20.62	17.72	18.11	10.16	10.16	3.81	59.4	59.4
0088	9	60	13.32	13.16	15.35	25.16	20.06	21.34	10.27	10.27	3.97	85.8	79.2
0103		75	13.32	13.16	15.35	25.16	20.06	21.34	10.27	10.27	3.97	85.8	79.2
0139	10	100	12.95	12.95	15.2	30.08	21.65	22.13	11.14	11.14	4.21	99.0	90.2
0165		125	12.95	12.95	15.2	30.08	21.65	22.13	11.14	11.14	4.21	101	92.4
0208	11	150	17.95	17.72	22.05	37.80	27.76	28.54	12.99	12.99	5	191	174
0250	12	200	19.84	19.69	23.62	45.98	31.50	32.28	13.78	13.78	5	233	211
0296		250	19.84	19.69	23.62	45.98	31.50	32.28	13.78	13.78	5	246	224
0362		300	19.84	19.69	23.62	45.98	31.50	32.28	13.78	13.78	5	257	235
0414	13	350	20.29	20.29	25.39	48.3	37.4	40.55	14.68	14.68	5.19	292	275
0515	14	450	26.86	26.86	31.97	61.3	44.88	46.38	14.72	14.72	7.71	504	475
0675		600	26.86	26.86	31.97	61.3	44.88	46.38	14.72	14.72	7.71	515	486
0930	15	800	50.2	49.61	--	80.4	54.33	--	14.73	14.91	--	1394	1195
1200		1000	50.2	49.61	--	80.4	54.33	--	14.73	14.91	--	1420	1221

600V Class

Model CIMR-AU5A □□□□	Frame Size	Max. Applicable Motor Capacity (HP)	Dimensions (in.)								Weight (lb)		
			WN1	W	W1	HN1	H	H1	DN1	D	D1	NEMA 1	Protected Chassis
0003	1	2	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.3	--
0004		3	5.51	5.51	7.64	12.06	10.24	11.81	5.79	5.79	1.34	7.3	--
0006	2	5	5.51	5.51	7.64	12.06	10.24	11.81	6.46	6.46	2.06	8.2	--
0009		7.5	5.51	5.51	7.64	12.06	10.24	11.81	6.46	6.46	2.06	8.2	--
0011	3	10	5.51	5.51	7.64	12.06	10.24	11.81	6.57	6.57	2.07	9.3	--
0017	5	15	7.09	7.09	9.21	13.38	11.81	13.39	7.36	7.36	2.83	13.0	--
0022		20	7.09	7.09	9.21	13.38	11.81	13.39	7.36	7.36	2.83	13.0	--
0027	6	25	8.66	8.66	11.65	15.47	13.78	16.54	7.76	7.76	2.91	20.1	--
0032		30	8.66	8.66	11.65	15.47	13.78	16.54	7.76	7.76	2.91	20.1	--
0041	8B	40	11.35	11.35	12.99	20.62	17.72	18.11	10.16	10.16	3.81	59.4	59.4
0052		50	11.35	11.35	12.99	20.62	17.72	18.11	10.16	10.16	3.81	59.4	59.4
0062	10	60	12.95	12.95	15.2	30.08	21.65	22.13	11.14	11.14	4.21	99.0	90.2
0077		75	12.95	12.95	15.2	30.08	21.65	22.13	11.14	11.14	4.21	99.0	90.2
0099	11	100	12.95	12.95	15.2	30.08	21.65	22.13	11.14	11.14	4.21	99.0	90.2
0125		125	17.95	17.72	22.05	37.80	27.76	28.54	12.99	12.99	5	191	174
0145	12	150	17.95	17.72	22.05	37.80	27.76	28.54	12.99	12.99	5	191	174
0192		200	19.84	19.69	23.62	45.98	31.50	32.28	13.78	13.78	5	233	235
0242	250	19.84	19.69	23.62	45.98	31.50	32.28	13.78	13.78	5	257	235	

Mechanical Installation Planning

Drive Watts Loss Data

240V Class

Model CIMR-AU2A[]	Rated Amps (A) ^{*1}	Heatsink Loss (W)	Interior Unit Loss (W)	Total Loss (W)
0004	3.5	18.4	47	66
0006	6.0	31	51	82
0008	8.0	43	52	95
0010	9.6	57	58	115
0012	12.0	77	64	141
0018	17.5	101	67	168
0021	21	138	83	222
0030	30	262	117	379
0040	40	293	145	437
0056	56	371	175	546
0069	69	491	205	696
0081	81	527	257	785
0110	110	719	286	1005
0138	138	842	312	1154
0169	169	1014	380	1394
0211	211	1218	473	1691
0250	250	1764	594	2358
0312	312	2020	665	2686
0360	360	2698	894	3591
0415	415	2672	954	3626

*1: Value assumes the carrier frequency is at default setting (refer to Technical Manual).

480V Class

Model CIMR-AU4A[]	Rated Amps (A) ^{*1}	Heatsink Loss (W)	Interior Unit Loss (W)	Total Loss (W)
0002	2.1	20	48	68
0004	4.1	32	49	81
0005	5.4	45	53	97
0007	6.9	62	59	121
0009	8.8	66	60	126
0011	11.1	89	73	162
0018	17.5	177	108	285
0023	23	216	138	354
0031	31	295	161	455
0038	38	340	182	521
0044	44	390	209	599
0058	58	471	215	686
0072	72	605	265	870
0088	88	684	308	993
0103	103	848	357	1205
0139	139	1215	534	1749
0165	165	1557	668	2224
0208	208	1800	607	2408
0250	250	2379	803	3182
0296	296	2448	905	3353
0362	362	3168	1130	4298
0414	414	3443	1295	4738
0515	515	4850	1668	6518
0675	675	4861	2037	6898
0930	930	8476	2952	11428
1200	1200	8572	3612	12184

*1: Value assumes the carrier frequency is at default setting (refer to Technical Manual).

Drive Watts Loss Data (continued)

600V Class


Model CIMR-AU5A- [REDACTED]	Normal Duty				Heavy Duty			
	Rated Amps (A) ¹	Heatsink Loss (W)	Interior Unit Loss (W)	Total Loss (W)	Rated Amps (A) ²	Heatsink Loss (W)	Interior Unit Loss (W)	Total Loss (W)
0003	2.7	21.5	23.3	44.8	1.7	28.9	19.8	48.7
0004	3.9	27.5	33.6	61.1	3.5	54.3	27.6	81.9
0006	6.1	28.1	43.7	71.8	4.1	53.0	27.0	80.0
0009	9.0	43.4	68.9	112.3	6.3	78.7	36.4	115.1
0011	11	56.1	88.0	144.0	9.8	110.9	49.5	160.3
0017	17	96.6	146.7	243.2	12.5	144.7	67.5	212.2
0022	22	99.4	178.3	277.7	17	203.8	81.1	284.8
0027	27	132.1	227.2	359.3	22	267.2	113.8	381.1
0032	32	141.6	279.9	421.5	27	332.9	132.2	465.1
0041	41	330.8	136.2	467.0	32	405.9	127.6	533.5
0052	52	427.8	166.2	594.0	41	527.2	161.4	688.5
0062	62	791.2	279.0	1070.2	52	1271.5	335.0	1606.5
0077	77	959.1	329.4	1288.6	62	1457.0	379.5	1836.5
0099	99	1253.2	411.7	1664.9	77	1267.0	352.0	1619.0

*1: Value assumes the carrier frequency is set to 2 kHz.

*2: Value assumes the carrier frequency is set to 8 kHz.


Electrical Installation Planning

Connection Diagram

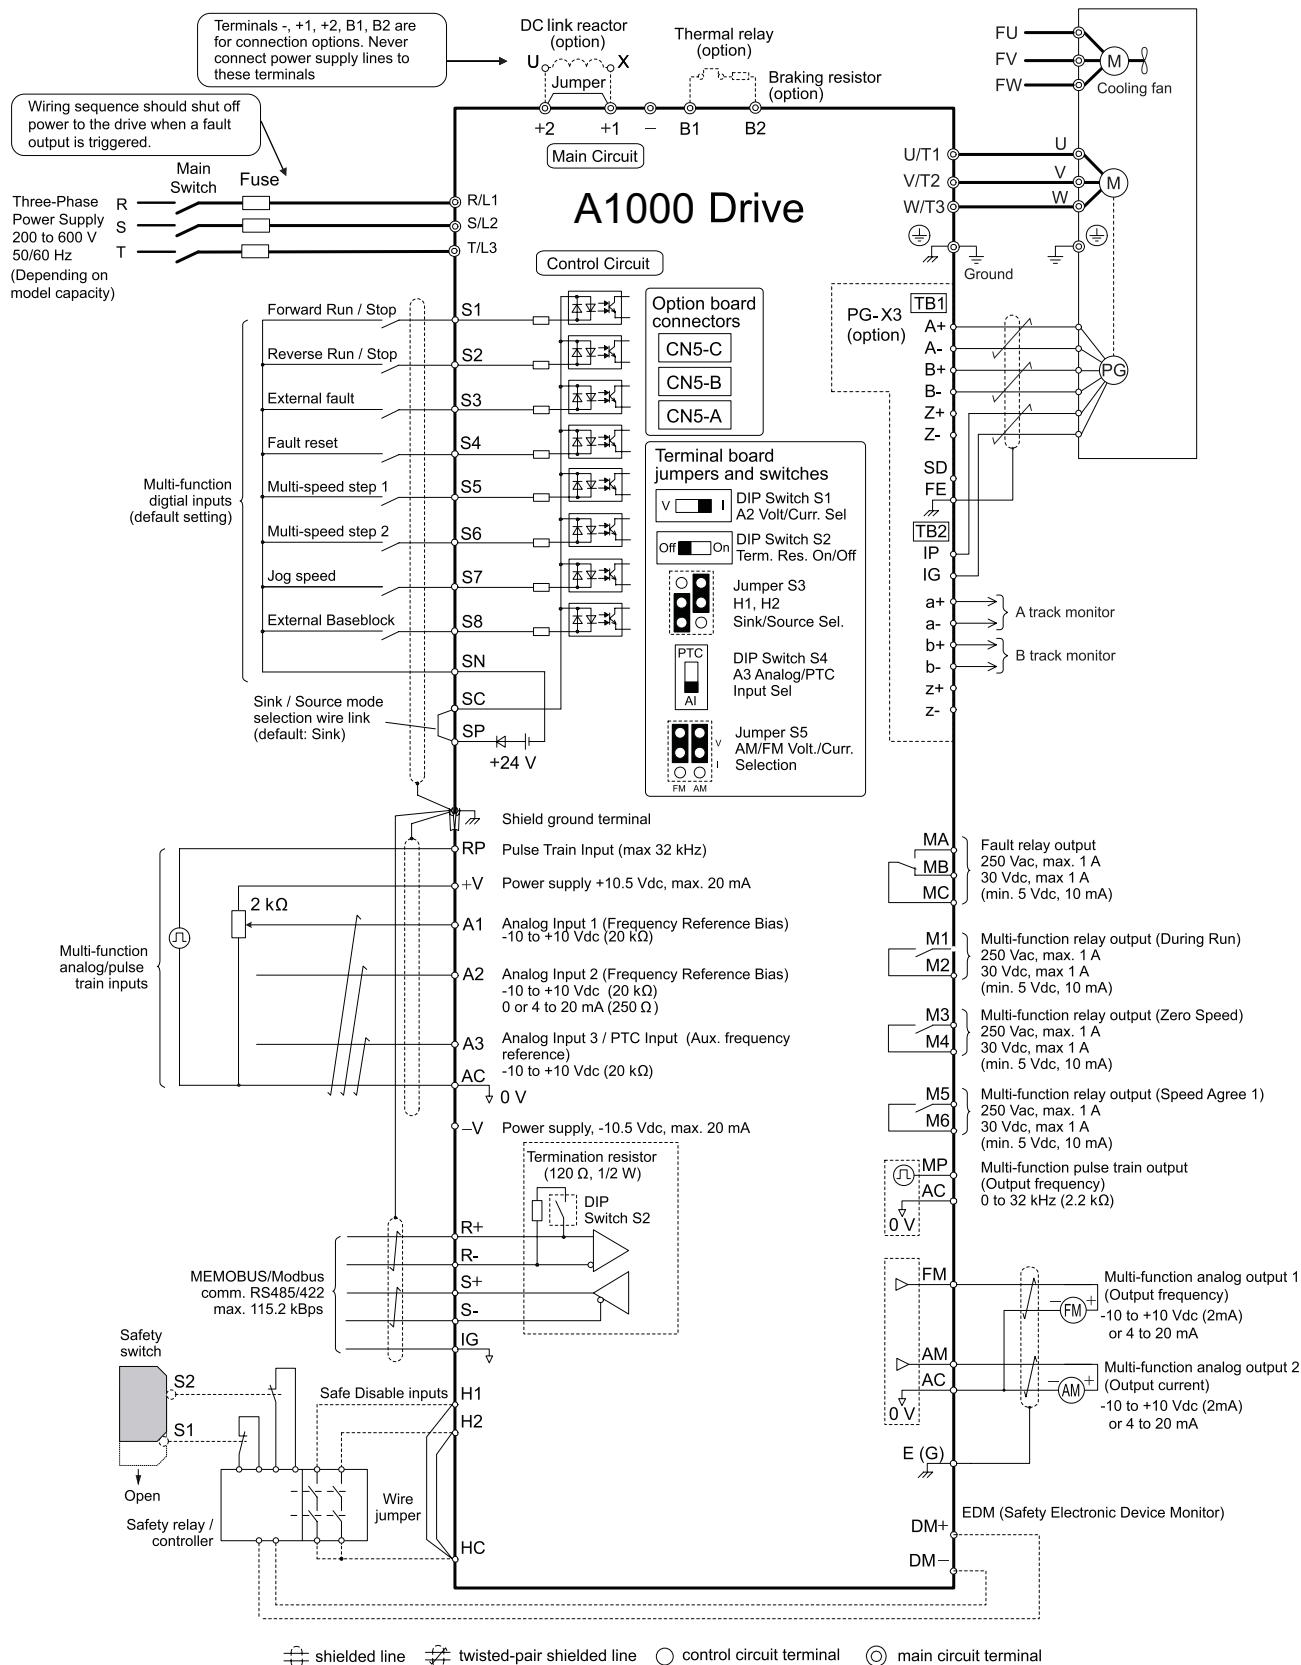

Control Circuit and Terminal Layout

Control circuit terminals should be arranged as shown below

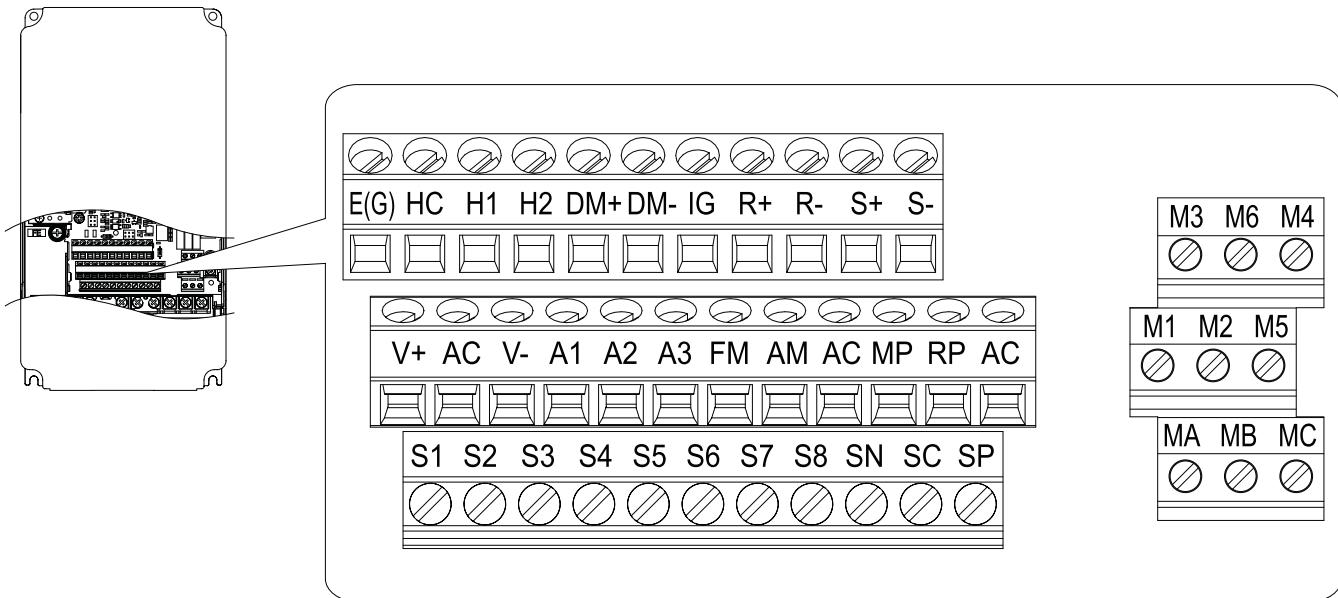

Electrical Installation Planning

Power Terminal Functions

240V Class

Voltage	240V			Function
Model CIMR-AU	2A0004 to 2A0081	2A0110, 2A0138	2A0169 to 2A0415	
Max. Applicable Motor Capacity HP	0.75 to 30	40, 50	60 to 175	
R/L1	Main circuit input power supply			Connects line power to the drive
S/L2				
T/L3				
U/T1	Drive output			Connects to the motor
V/T2				
W/T3				
B1	Braking resistor unit		Not available	Available for connecting a braking resistor or a braking resistor unit option
B2				
+2	• DC reactor connection (+1, +2) (remove the shorting bar between +1 and +2)		Not available	For connection • of the drive to a DC power supply (terminals +1 and – are not EU/CE or UL approved) • of dynamic braking options • of a DC link reactor
+1			• DC power supply input (+1, –)	
–	• DC power supply input (+1, –)		• DC power supply input (+1, –)	
+3	Not available		• Braking unit connection (+3, –)	
⏚	Ground terminal (100 Ω or less)			Grounding terminal

480V Class

Voltage	480V			Function
Model CIMR-AU	4A0002 to 4A0044	4A0058, 4A0072	4A0088 to 4A1200	
Max. Applicable Motor Capacity HP	0.75 to 30	40,50	60 to 1000	
R/L1	Main circuit input power supply			Connects line power to the drive
S/L2				
T/L3				
U/T1	Drive output			Connects to the motor
V/T2				
W/T3				
B1	Braking resistor unit		Not available	Available for connecting a braking resistor or a braking resistor unit option
B2				
+2	• DC reactor connection (+1, +2) (remove the shorting bar between +1 and +2)		Not available	For connection • of the drive to a DC power supply (terminals +1 and – are not EU/CE or UL approved) • of dynamic braking options • of a DC link reactor
+1			• DC power supply input (+1, –)	
–	• DC power supply input (+1, –)		• DC power supply input (+1, –)	
+3	Not available		• Braking unit connection (+3, –)	
⏚	Ground terminal (100 Ω or less)			Grounding terminal

600V Class

Voltage	600V			Function
Model CIMR-AU	5A0003 to 5A0032	5A0041 to 5A0099	5A0125 to 5A0242	
Max. Applicable Motor Capacity HP	1 to 30	40 to 100	125 to 250	
R/L1	Main circuit input power supply			Connects line power to the drive
S/L2				
T/L3				
U/T1	Drive output			Connects to the motor
V/T2				
W/T3				
B1	Braking resistor unit		Not available	Available for connecting a braking resistor or a braking resistor unit option
B2				
+2	• DC reactor connection (+1, +2) (remove the shorting bar between +1 and +2)		Not available	For connection • of the drive to a DC power supply (terminals +1 and – are not EU/CE or UL approved) • of dynamic braking options • of a DC link reactor
+1			• DC power supply input (+1, –)	
–	• DC power supply input (+1, –)		• DC power supply input (+1, –)	
+3	Not available		• Braking unit connection (+3, –)	
⏚	Ground terminal (100 Ω or less)			Grounding terminal

Control Terminal Functions

Input Terminals

Classification	Terminal	Terminal Name (Function)		Default Setting	Function (Signal Level)
Multi-function Digital Inputs	S1	Multi-function input selection 1		Closed: Forward run (Open: Stop)	<ul style="list-style-type: none"> Photocoupler 24 Vdc, 8 mA Set the S3 jumper to select between sinking, sourcing mode, and the power supply.
	S2	Multi-function input selection 2		Closed: Reverse run (Open: Stop)	
	S3	Multi-function input selection 3		External fault, N.O.	
	S4	Multi-function input selection 4		Fault reset	
	S5	Multi-function input selection 5		Multi-step speed reference 1	
	S6	Multi-function input selection 6		Multi-step speed reference 2	
	S7	Multi-function input selection 7		Jog reference	
	S8	Multi-function input selection 8		Closed: External baseblock	
	SC	Multi-function input common			Multi-function input common
	SP	Digital input power supply +24 Vdc			24 Vdc power supply for digital inputs, 150 mA max (only when not using digital input option DI-A3) NOTICE: Do not jumper or short terminals SP and SN. Failure to comply will damage the drive
Safe Disable Inputs	H1	Safe Disable input 1 ²			<ul style="list-style-type: none"> 24 Vdc, 8 mA One or both open: Output disabled Both closed: Normal operation Internal impedance: 3.3 kΩ Off time of at least 1 ms
	H2	Safe Disable input 2 ²			Disconnect the wire jumpers shorting terminals H1, H2, and HC to use the Safe Disable inputs. Set the S5 jumper to select between sinking, sourcing mode, and the power supply
	HC	Safe Disable input common			Safe Disable input common
Multi-function Analog/Pulse Train Inputs	RP	Multi-function pulse train input	Frequency reference		<ul style="list-style-type: none"> Input frequency range: 0 to 32 kHz Signal Duty Cycle: 30 to 70% High level: 3.5 to 13.2 Vdc, low level: 0.0 to 0.8 Vdc Input impedance: 3 kΩ
	+V	Power supply for analog inputs			+10.5 Vdc (max allowable current 20 mA)
	-V	Power supply for analog inputs			-10.5 Vdc (max allowable current 20 mA)
	A1	Multi-function analog input 1	Frequency reference		-10 to 10 Vdc, 0 to 10 Vdc (input impedance: 20 kΩ)
	A2	Multi-function analog input 2	Frequency reference		<ul style="list-style-type: none"> -10 to 10 Vdc, 0 to 10 Vdc (input impedance: 20 kΩ) 4 to 20 mA, 0 to 20 mA (input impedance: 250 Ω)
	A3	Multi-function analog input 3	Auxiliary frequency reference/PTC Input		<ul style="list-style-type: none"> -10 to 10 Vdc, 0 to 10 Vdc (input impedance: 20 kΩ) Use DIP switch S4 on the terminal board to select between analog and PTC input.
	AC	Frequency reference common			0 V
	E(G)	Ground for shielded lines and option cards			-

Output Terminals

Classification	Terminal	Terminal Name (Function)		Default Setting	Function (Signal Level)
Fault Relay Outputs	MA	N.O			30 Vdc, 10 mA to 1 A; 250 Vac, 10 mA to 1 A Minimum load: 5 Vdc, 10 mA
	MB	NC			
	MC	Fault output common			
Multi-Function Digital Output ¹	M1	Multi-function digital output	During run		30 Vdc, 10 mA to 1 A; 250 Vac, 10 mA to 1 A Minimum load: 5 Vdc, 10 mA
	M2				
	M3	Multi-function digital output	Zero speed		
	M4				
	M5	Multi-function digital output	Speed Agree 1		
	M6				
Monitor Output	MP	Pulse train output	Output frequency		32 kHz (max)
	FM	Analog monitor output 1	Output frequency		
	AM	Analog monitor output 2	Output current		-10 to +10 Vdc, or 0 to +10 Vdc
	AC	Monitor common			0 V
Safety Monitor Output ²	DM+	Safety monitor output			Outputs status of Safe Disable function. Closed when both Safe Disable channels are closed. Up to +48 Vdc 50 mA
	DM-	Safety monitor output common			

Communication Terminals

Classification	Terminal	Signal Function		Description	Function (Signal Level)		
Modbus Communication ³	R+	Communication input		Modbus communication: use an RS-485 or RS-422 cable to connect the A1000	RS-485/422 Modbus communication protocol 115.2 kbps (max.)		
	R-						
	S+	Communication output					
	S-						
	IG	Shield ground					

¹: Refrain from assigning functions to digital relay outputs that involve frequent switching, as doing so may shorten relay performance life. Switching life is estimated at 200,000 times (assumes 1 A, resistive load).

²: Terminals H1, H2, DM+, and DM- on 600V class models are designed to the functionality, but are not certified to EN61800-5-1, EN954-1/ISO13849 Cat. 3, IEC/EN61508 SIL2, Insulation coordination: class 1.

³: Enable the termination resistor in the last drive in a Modbus network by setting DIP switch S2 to the ON position.

A1000 Configured Package

Customizable Packages for any Environment

The A1000 Configured package provides an A1000 in a NEMA 1, NEMA 12, or NEMA 3R enclosure, with space for several commonly used options, such as reactors, RFI filters, circuit breakers, etc. These packages have been designed for flexibility in providing commonly requested features and options to provide a customized drive solution..



Ratings

- 240 VAC: 1 to 150 HP
- 480 VAC: 1 to 1000 HP
- 600 VAC: 1 to 200 HP

Service Conditions

- Ambient service temperature: -10 to 40°C (14 to 104°F)
- Ambient storage temperature: -20 to 60°C (-4 to 140°F)
- Humidity: 0 to 95%, non-condensing
- Altitude: Up to 1000 m (3300 ft); higher by derating
- Vibration: 0.33 mm (10 to 20 Hz), 0.22 G (20 to 55 Hz)

Standards and Reliability

- UL 508A (Industrial Control Panels)
- UL, cUL listed


Configured Options

- Feedback cards
- Input and output cards
- Network communication cards
- Input breaker
- Input disconnect
- Input fuses
- 120 VAC interface
- Line/load reactors
- Input filter
- Bus reactor (for small HP ratings)
- Dynamic braking
- Blower motor starter
- Door-mounted Hand/Off/Auto switch
- Door-mounted speed pot

A1000 Configured Drive Selection

Customizable Packages for any Environment

To construct a Configured model number, find the base number for the required enclosure type, voltage, and current rating. Add the option code for each required option. Power options are preceded by P and Control options are preceded by T.

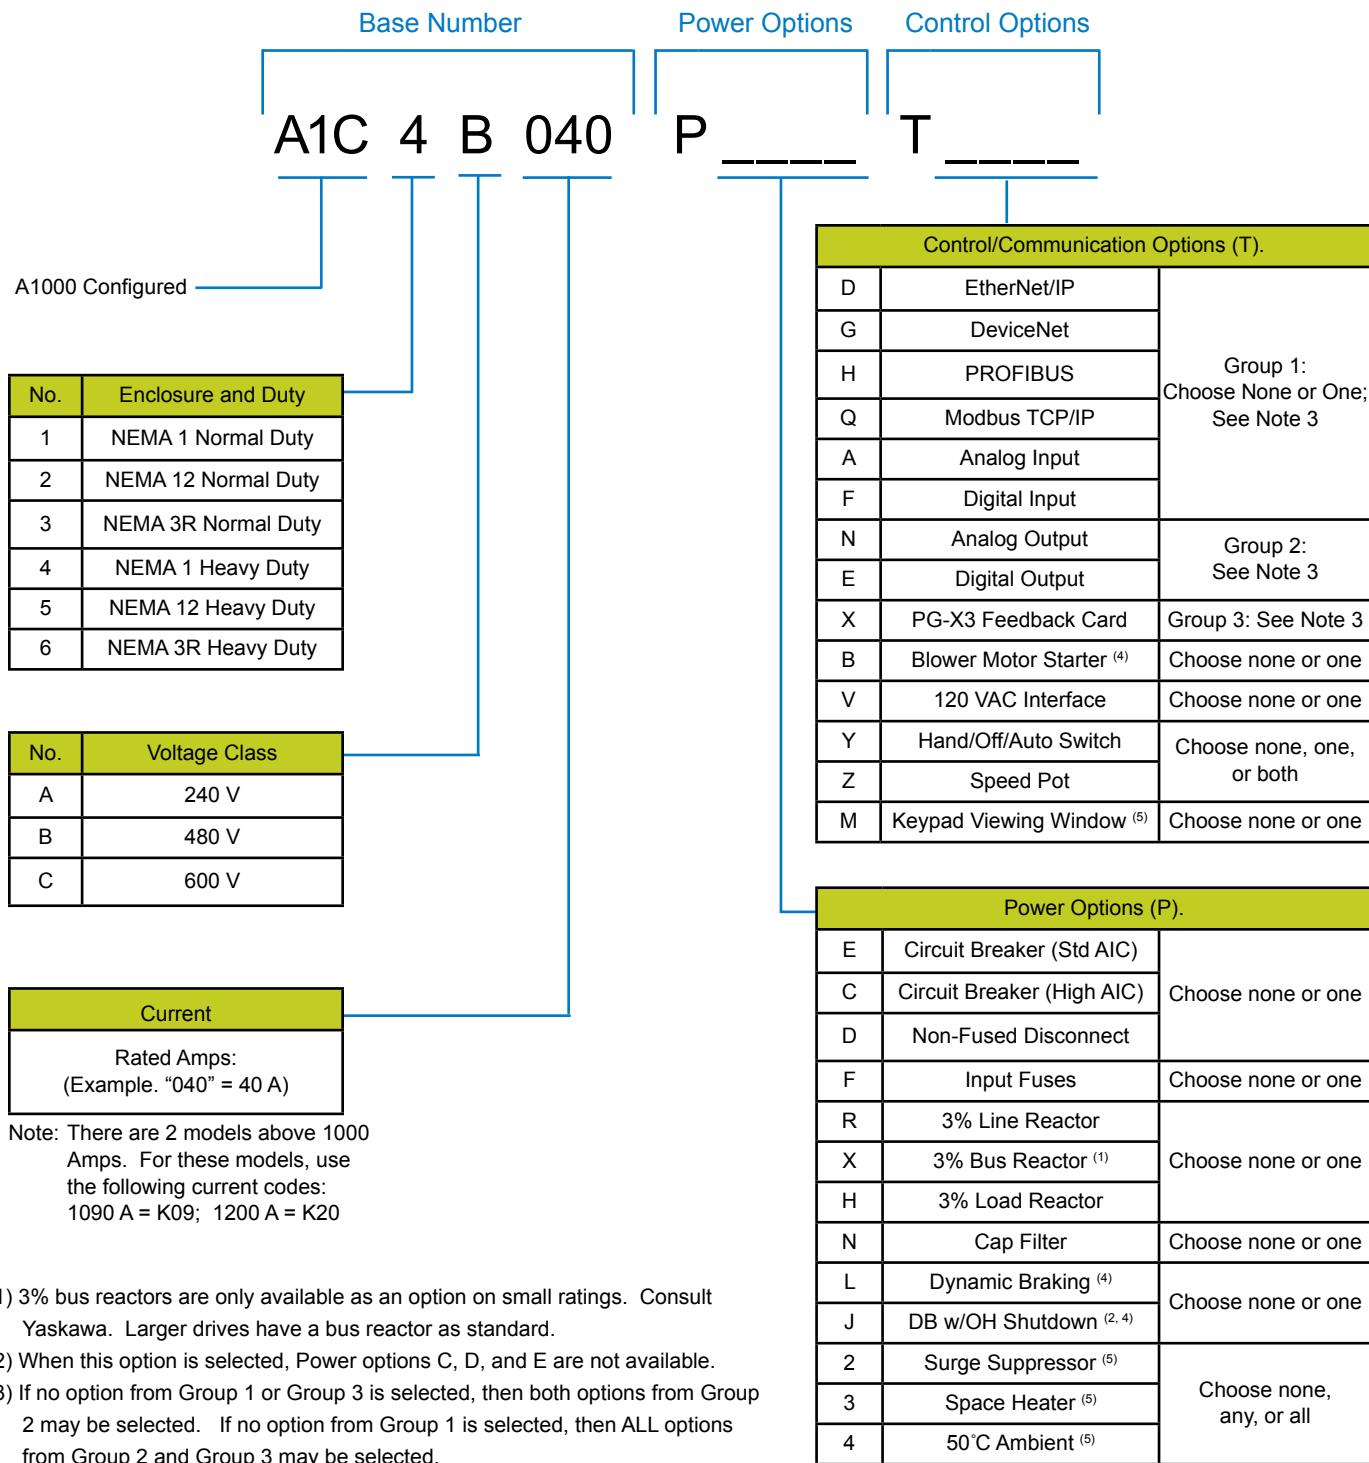

(1) 3% bus reactors are only available as an option on small ratings. Consult Yaskawa. Larger drives have a bus reactor as standard.

(2) When this option is selected, Power options C, D, and E are not available.

(3) If no option from Group 1 or Group 3 is selected, then both options from Group 2 may be selected. If no option from Group 1 is selected, then ALL options from Group 2 and Group 3 may be selected.

(4) Not available for NEMA 3R enclosures

(5) NEMA 3R enclosures only.

Yaskawa Industrial Drives Family

Selection Matrix

Product	Dedicated Enclosure Types	Power Range	Performance (IM = Induction Motor) (PM = Permanent Magnet Motor)		
			Volts per Hertz	Open Loop Vector	Closed Loop Vector
A1000 General Purpose High Performance Vector	Type 1 or Protected Chassis	3/4 [175HP @ 240V 3-Phase 3/4 [1000HP @ 480V 3-Phase 1 [250HP @ 600 VAC	40:1 (IM) 100:1 (PM)	200:1 (IM) 1500:1 (PM)	1500:1 (IM) 1500:1 (PM)
P1000 Industrial Fan and Pump	Type 1 or Protected Chassis	3/4 [175HP @ 240V 3-Phase 1 [1000HP @ 480V 3-Phase 2 [250HP @ 600 VAC	40:1 (IM)		
V1000 Compact Vector	Type 1 Type 4X/12 or Protected Chassis	1/8 [5HP @ 240V 1-Phase 1/8 [25HP @ 240V 3-Phase 1/2 [25HP @ 480V 3-Phase	40:1 (IM)	100:1 (IM) 10:1 (PM)	
J1000 Ultra Compact	Protected Chassis	1/8 [3HP @ 240V 1-Phase 1/8 [5HP @ 240V 3-Phase 1/2 [7.5HP @ 480V 3-Phase	40:1 (IM)		

Maximum Frequency (Standard Firmware)	Inputs and Outputs						Communications										Safe-Torque-Off			
	Analog Inputs	Analog Outputs	Digital Inputs	Digital Outputs	Pulse Train Inputs	Pulse Train Outputs	EtherNet/IP	DeviceNet	Modbus TCP/IP	Modbus RTU	MECHATROLINK-II	MECHATROLINK-III	PROFIBUS-DP	PROFINET	EtherCAT	Metasys / Apogee	BACnet	LonWorks	Auxiliary Control Power Input	
400 Hz (1000 Hz)	3	2	8	4	1	1	■	■	■	●	■	■	■	■	■	■	■	■	■	Cat 3 PLd SIL CL2
120 Hz	2	2	7	3			■	■	■	●	■	■	■	■	■	■	■	■	■	
400 Hz (1167 Hz)	2	1	7	3	1	1	■	■	■	●	■	■	■	■	■	■	■	■	■	Cat 3
400 Hz	1	1	5	1						■										

 Standard

 Option



Global Service Network



Region	Service Area	Service Location	Service Agency	Telephone/Fax
North America	U.S.A	Chicago (HQ) Los Angeles New Jersey Boston San Francisco Ohio North Carolina	① YASKAWA AMERICA, INC.	Headquarters ☎ +1-847-887-7303 FAX +1-847-887-7070
	Mexico	Mexico City	② PILLAR MEXICANA. S.A. DE C.V.	☎ +52-5593-28-69 FAX +52-5651-55-73
South America	South America	São Paulo	③ YASKAWA ELÉCTRICO DO BRASIL LTD.A.	☎ +55-11-3585-1100 FAX +55-11-5581-8795
	Colombia	Bogota	④ VARIADORES LTD.A.	☎ +57-91-635-7460 FAX +57-91-611-3872
	Argentina	Buenos Aires	⑤ ELINSUR, SRL	☎ +54-11-4918-2056 FAX +54-11-4918-1183
Europe	Europe and South Africa	Frankfurt	⑥ YASKAWA ELECTRIC EUROPE GmbH	☎ +49-6196-569-300 FAX +49-6196-569-398
			⑦ YASKAWA ENGINEERING EUROPE GmbH	☎ +49-6196-569-520 FAX +49-6196-888-598
Asia	Japan	Tokyo, offices nationwide	⑧ YASKAWA ELECTRIC CORPORATION (Manufacturing, sales)	☎ +81-3-5402-4502 FAX +81-3-5402-4580
			⑨ YASKAWA ELECTRIC ENGINEERING CORPORATION (After-sales service)	☎ +81-4-2931-1810 FAX +81-4-2931-1811
	South Korea	Seoul	⑩ YASKAWA ELECTRIC KOREA CORPORATION	☎ +82-2-784-7844 FAX +82-2-784-8495
			⑪ YASKAWA ENGINEERING KOREA Co.	☎ +82-2-3775-0337 FAX +82-2-3775-0338
			⑫ Rockwell Samsung Automation Co., Ltd.	☎ +82-331-200-2981 FAX +82-331-200-2970
	China	Beijing, Guangzhou, Shanghai	⑬ YASKAWA ELECTRIC (SHANGHAI) Co., Ltd.	☎ +86-21-5385-2200 FAX +86-21-5385-3299
	Taiwan	Taipei	⑭ YASKAWA ELECTRIC TAIWAN Co.	☎ +886-2-2502-5003 FAX +886-2-2505-1280
	Singapore	Singapore	⑮ YASKAWA ELECTRIC (SINGAPORE) Pte. Ltd.	☎ +65-6282-3003 FAX +65-6289-3003
			⑯ YASKAWA ENGINEERING ASIA-PACIFIC Pte. Ltd.	☎ +65-6282-1601 FAX +65-6282-3668
	Thailand	Bangkok	⑰ YASKAWA ELECTRIC (THAILAND) Co., Ltd.	☎ +66-2-693-2200 FAX +66-2-693-2204
	India	Mumbai	⑱ LARSON & TOUBRO LIMITED	Headquarters ☎ +91-22-67226200 +91-22-27782230 FAX +91-22-27783032
Oceania	Australia	Sydney (HQ) Melbourne	⑲ ROBOTIC AUTOMATION Pty. Ltd.	Headquarters ☎ +61-2-9748-3788 FAX +61-2-9748-3817

YASKAWA



Yaskawa America, Inc.
Drives & Motion Division

2121 Norman Drive South
Waukegan, IL 60085

Tel: 1-800-YASKAWA (927-5292) • Fax: 1-847-887-7310

www.yaskawa.com

Document BL.A1000.01 04/15/2016 • © 2011-2016