

NOTES

- UTILITY NOTES:

 1. CONTRACTOR RESPONSIBLE FOR VERIFYING EXISTING ELEVATIONS COMPARED TO THOSE SHOWN ON PLAN PRIOR TO GRADING. NOTIFY OWNER'S REPRESENTATIVE IF
- DISCREPANCIES ARE FOUND. AREAS FOR CONSTRUCTION THAT REQUIRE DE-WATERING FOR EXCAVATION WILL BE DONE AT NO ADDITIONAL COST TO THE OWNER.
- ALL WATER AND SEWER MATERIALS AND CONSTRUCTION SHALL BE IN COMPLIANCE WITH FRANKFORT PLANT BOARD AND CITY OF FRANKFORT SEWER DEPARTMENT'S STANDARD SPECIFICATIONS.
- MAINTAIN MINIMUM 10 FEET HORIZONTAL SEPARATION BETWEEN WATER & SANITARY SEWER OR 18" VERTICAL SEPARATION AT CROSSING LOCATIONS.
- REFER TO CITY OF FRANKFORT STANDARD SPECIFICATIONS FOR PIPE BEDDING
- ALL WATER VALVES TO BE LOCATED OUTSIDE OF PAVED AREAS WHERE POSSIBLE.
 THE CONTRACTOR SHALL PROVIDE A COMPLETE SET OF AS-BUILT DRAWINGS OF
- WATER & SANITARY SEWER CONSTRUCTION PRIOR TO THE ACCEPTANCE OF THE ANY WORK REQUIRED ON THE PUBLIC MAIN TO BE PERFORMED BY THE FRANKFORT PLANT BOARD. PAVEMENT REPAIR SHALL BE DONE IN ACCORDANCE WITH CITY OF
- FRANKFORT PUBLIC WORKS STANDARDS. 9. WATER LINES SHALL BE INSTALLED AT A MINIMUM DEPTH OF 2.5 FEET BELOW FINISHED
- 10. REFERENCE ARCHITECTURAL AND MEP PLANS FOR EXACT UTILITY TIE-IN LOCATIONS
- 11. SEE MEP PLANS FOR COMMUNICATIONS AND FLECTRIC ROUTING.
 12. ALL UTILITIES STALL BE FRUM UNDERGROUND SERVICE.
- **EXISTING UTILITIES NOTES**
- CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND NOTIFY ENGINEER IMMEDIATELY OF ANY DISCREPANCIES AND/OR CONFLICTS WITH EXISTING OR PROPOSED UTILITIES PRIOR TO PROCEEDING.

FRANCHISE UTILITY NOTES 1. TELEPHONE UTILITY CONSTRUCTION SHALL COMPLY WITH AT&T KENTUCKY STANDARD

- SPECIFICATIONS. COMMUNICATION CONDUIT INSTALLATION SHALL COMPLY WITH FRANKFORT PLANT BOARD TELECOM STANDARD SPECIFICATIONS.
- UNDERGROUND ELECTRICAL INSTALLATION SHALL COMPLY WITH FRANKFORT PLANT BOARD STANDARD SPECIFICATIONS.
- . NATURAL GAS CONSTRUCTION & INSTALLATION SHALL COMPLY WITH COLUMBIA GAS OF KENTUCKY STANDARD SPECIFICATIONS.
- SEE COVER SHEET (0.1) FOR FRANCHISE UTILITY CONTACT INFORMATION.

EXISTING SANITARY MANHOLE VACUUM TEST NOTE

1. PRIOR TO ANY DISTURBANCE ON THE SITE, THE CONTRACTOR SHALL PERFORM A VACUUM TEST OF 5 PSI ON THE MH 1-528. IF THE MH 1-528 PASSES THE VACUUM TEST, ANOTHER SUCCESSFUL VACUUM TEST WILL BE REQUIRED AFTER THE MANHOLE MODIFICATIONS.

2. PRIOR TO ANY DISTURBANCE ON THE SITE, THE CONTRACTOR SHALL PERFORM A VACUUM TEST OF 5 PSI ON THE MH 1-527. IF THE MH 1-527 PASSES THE VACUUM TEST, ANOTHER SUCCESSFUL VACUUM TEST WILL BE REQUIRED AFTER THE MANHOLE MODIFICATIONS.


FRANKFORT SEWER DEPARTMENT NOTES


- THE CONTRACTOR SHALL CONTACT FSD, 502.875.2448, PRIOR TO CONSTRUCTION TO ALLOW THE FRANKFORT SEWER DEPARTMENT TO CCTV THE EXISTING SEWERS. UPON COMPLETION OF CONSTRUCTION, FSD WILL CCTV THE EXISTING SEWERS AGAIN. THE CONTRACTOR WILL BE HELD RESPONSIBLE FOR ANY DAMAGE TO THE EXISTING SEWER SYSTEM RESULTING FROM CONSTRUCTIONS (I.E. DAMAGED PIPES, SILTED
- 2. NO DISCHARGE WILL BE ALLOWED UNTIL THE FRANKFORT SEWER DEPARTMENT WITNESSES INSTALLATION, TESTING AND APPROVES THE CONNECTION. OWNER WILL BE REQUIRED TO PAY A CAPACITY / TAP FEE BASED UPON THE NUMBER AND SIZE OF WATER METERS ON THE PROPERTY. IF THE EXISTING WATER METER IS TO BE UPSIZED THE FEE WILL BE BASED UPON THE DIFFERENCE IN SIZE.

REVISIONS:

02/08/2022 STORM LINE UPDATES

0



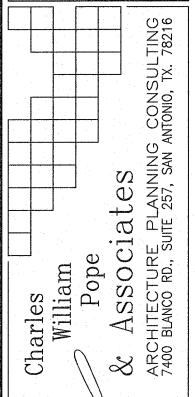

DATE: 12/28/2021 JOB NO: 118423003 DRAWN BY: SHEET NUMBER

2.2.1

PERMIT SET

